
CERTIFICATE

Certified Passive House Component

Component-ID 1241ds03 valid until 31st December 2025

Passive House Institute Dr. Wolfgang Feist 64283 Darmstadt Germany

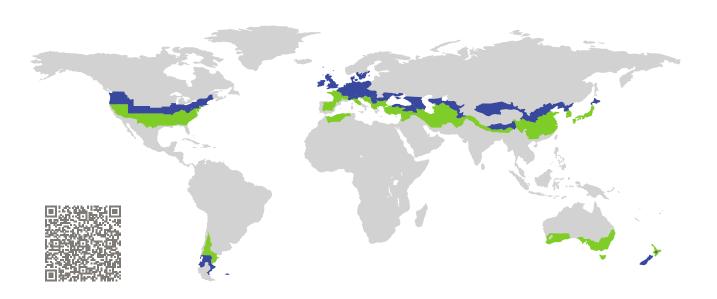

Category: **Door system**

Manufacturer: Wescon Cedar Products Ltd.

Duncan Canada

Product name: Wood Entry Door (Solid)

This certificate was awarded based on the following criteria for the cool, temperate climate zone

 $\mbox{Comfort} \quad \mbox{$U_{\hspace{-0.5mm}D}$= 0.70} \qquad \leq \quad 0.80 \, \mbox{$W/(m^2 \, K)$}$

 $U_{D,\text{installed}} \leq 0.85 \text{ W/(m}^2 \text{ K)}$ with $U_{\text{door leaf}}^1 = 0.46 \text{ W/(m}^2 \text{ K)}$


Hygiene $f_{Rsi=0.25}$ \geq 0.70



(Inward opening)

¹U-value of the insulated area of door leaf



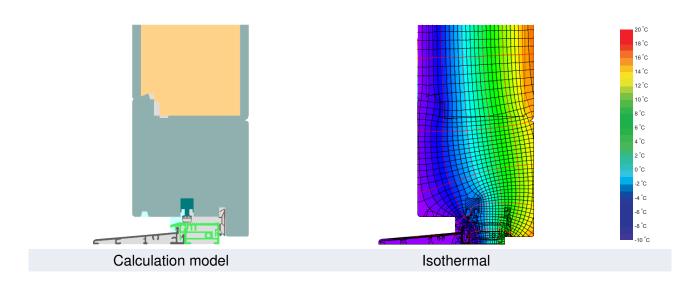

Description

Spruce / fir timber frame; door panel of timber with wood fibre insulation (STEICO Flex 0,039 W/(mK)). At the threshold, the temperature factor for the cool temperate climate is not achieved. Nevertheless, this value is much better than usual. Beyond the requirements, airtightness class 4 according to EN 12207 is achieved. For the sidelight, Superspacer Premium values are used, with a butyl secondary seal.

Explanation

The U-values of the door apply to a combination of door and sidelight with fixed glazing, 2.20 m wide by 2.20 m tall. The door and the sidelight are both 1.10 m wide.


A detailed report of the calculations performed in the context of certification is available from the manufacturer.


Unless stated otherwise, the air tightness was determined according to EN 1026 with respect to the joint length under climate load in conjunction with EN 1121 for the closed, non-locked door. The result corresponds at least to air-tightness class 3 according to EN 12207.


The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Frame values	6		Frame width <i>b_f</i> mm	<i>U</i> -value frame <i>U_f</i> W/(m² K)	Ψ edge Ψ_g W/(m K)	Temp. Factor f _{Rsi=0.25} [-]
Mullion 1 casement	(1M1)	7	156	0.88	0.012	0.71
Door hinge side	(DJ1)	1	176	0.86	0.003	0.74
Door lock side	(DL1)		176	0.88	0.003	0.71
Bottom fixed	(FB1)	1	78	0.79	0.020	0.73
Top fixed	(FH1)	T	78	0.79	0.020	0.73
Lateral fixed	(FJ1)		78	0.79	0.020	0.73
Flying Mul- lion	(FM1)	7	244	0.86	0.003	0.74
Тор	(OH1)	T	176	0.86	0.003	0.74
Threshold	(OT2)	<u>_</u>	137	1.12	0.003	0.56
			Spacer:	Secondary seal:		

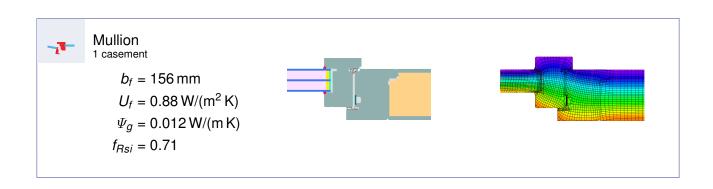

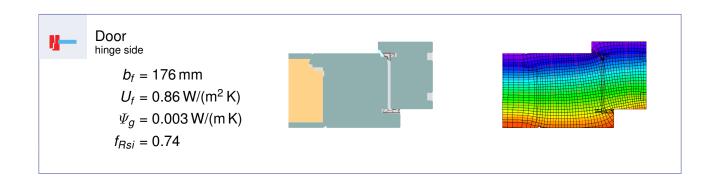




 $U_f = 0.88 \, \text{W/(m}^2 \, \text{K)}$

 $\Psi_g = 0.003 \, \text{W/(m K)}$

 $f_{Rsi}=0.71$






Bottom


 $b_f = 78 \,\mathrm{mm}$

 $U_f = 0.79 \, \text{W/(m}^2 \, \text{K)}$

 Ψ_g = 0.020 W/(m K)

 $f_{Rsi}=0.73$








Top fixed


 $b_f = 78 \, \text{mm}$

 $U_f = 0.79 \, \text{W/(m}^2 \, \text{K)}$

 $\Psi_g = 0.020 \, \text{W/(m K)}$

 $f_{Rsi}=0.73$








Lateral fixed


 $b_f = 78 \,\mathrm{mm}$

 $U_f = 0.79 \, \text{W/(m}^2 \, \text{K)}$

 $\Psi_g = 0.020 \, \text{W/(m K)}$

 $f_{Rsi} = 0.73$







Flying Mullion


 $b_f = 244 \, \text{mm}$

 $U_f = 0.86 \, \text{W/(m}^2 \, \text{K)}$

 Ψ_g = 0.003 W/(m K)

 $f_{Rsi}=0.74$








Тор


$$b_f = 176 \,\mathrm{mm}$$

$$U_f = 0.86 \, \text{W/(m}^2 \, \text{K)}$$

$$\Psi_g$$
 = 0.003 W/(m K)

$$f_{Rsi} = 0.74$$







Threshold


$$b_f = 137 \, \text{mm}$$

$$U_f = 1.12 \, \text{W/(m}^2 \, \text{K)}$$

$$\Psi_g$$
 = 0.003 W/(m K)

$$f_{Rsi}=0.56$$





Validated installations

