


CERTIFICATE

Certified Passive House Component

Component-ID 1491wi05 valid until 31st December 2025

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

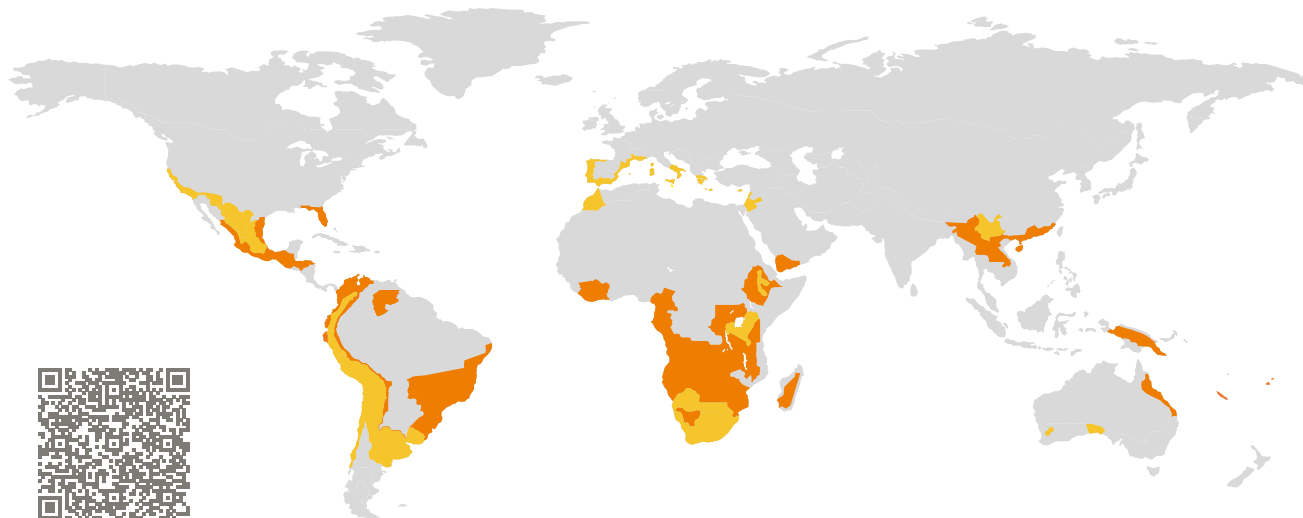


Category: **Window Frame**
Manufacturer: **Cerramientos Orell SL,
Manacor, Illes Balears,
Spain**
Product name: **STANDARD 78 ORELL**

**This certificate was awarded based on the following
criteria for the warm climate zone**

Comfort $U_W = 1.20 \leq 1.20 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{W, \text{installed}} \leq 1.25 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 1.10 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.55$



Passive House
efficiency class

phE

phD

phC

phB

phA


www.passivehouse.com

warm climate




**CERTIFIED
COMPONENT**

Passive House Institute

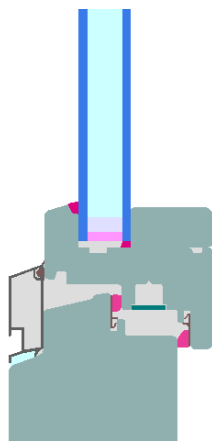

Calculation model



Isothermal

Description

Timber window frame, 0,11 W/(mK), with aluminium rain rail. Pane thickness: 24 mm (4/16/4/0/0), rebate depth: 17 mm. Spacer: TGI-Spacer Precision.

Explanation

The window U-values were calculated for the test window size of 1.23 m × 1.48 m with $U_g = 1.10$ W/(m² K). If a higher quality glazing is used, the window U-values will improve as follows:




Glazing	$U_g =$	1.10	1.05	1.20	1.30	W/(m ² K)
		↓	↓	↓	↓	
Window	$U_W =$	1.20	1.17	1.28	1.35	W/(m ² K)





Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Validated installations

Lighthouse timber top (operable)		Ventilated facade		Exterior insulation and finishing system (EIFS) (operable)	
$U_{\text{Wall}} = 0.28 \text{ W}/(\text{m}^2 \text{ K})$		$U_{\text{Wall}} = 0.30 \text{ W}/(\text{m}^2 \text{ K})$		$U_{\text{Wall}} = 0.31 \text{ W}/(\text{m}^2 \text{ K})$	
					
Ψ_{install}	W/(m K)	Ψ_{install}	W/(m K)	Ψ_{install}	W/(m K)
Top	0.005	Top	0.006	Top	0.004
Side	0.005	Side	0.006	Side	0.004
Bottom	0.021	Bottom	0.035	Bottom	0.053
$U_{W,\text{installed}} = 1.23 \text{ W}/(\text{m}^2 \text{ K})$		$U_{W,\text{installed}} = 1.24 \text{ W}/(\text{m}^2 \text{ K})$		$U_{W,\text{installed}} = 1.25 \text{ W}/(\text{m}^2 \text{ K})$	

Frame values			Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ -glazing edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Flying Mulinion	(FM1)		108	1.19	0.034	0.56
Bottom	(OB1)		110	1.23	0.034	0.56
Top	(OH1)		95	1.14	0.034	0.57
Lateral	(OJ1)		95	1.14	0.034	0.57
Spacer: TGI-Spacer Precision			Secondary seal: Polysulfide			

