


CERTIFICATE

Certified Passive House Component

Component-ID 0829ed03 valid until 31st December 2017

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

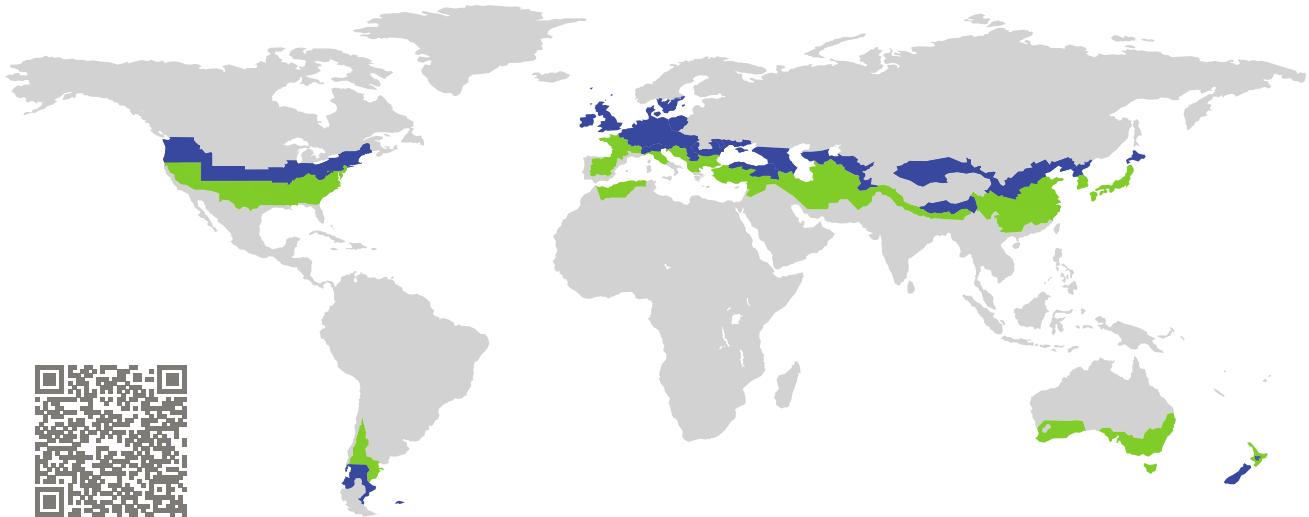


Category: **Entry door (opaque)**
Manufacturer: **Josko Fenster und Türen GmbH**
Kopling
Austria
Product name: **NEVOS SET C8**

This certificate was awarded based on the following criteria for the cool, temperate climate zone

Comfort $U_D = 0.75 \leq 0.80 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{D,\text{installed}} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$
with $U_{\text{door leaf}}^1 = 0.37 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.70$
Airtightness $Q_{100} \leq 2.25 \text{ m}^3/(\text{h m})$



(Inward opening)


¹U-value of the insulated area of door leaf

cool, temperate climate




**CERTIFIED
COMPONENT**

Passive House Institute

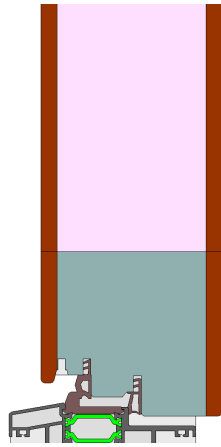

Calculation model

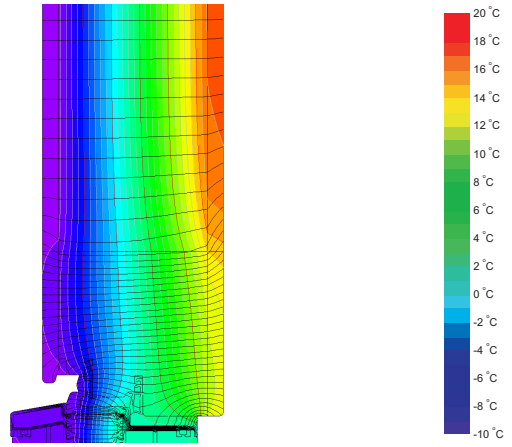

Isothermal

Description

Door frame made of wood profiles (spruce 0.11 W/(mK)), surface layer: fibre reinforced composite, door leaf insulation: PU-foam 0.030 W/(mK), threshold: thermally separated aluminum profile


Explanation


A detailed report of the calculations performed in the context of certification is available from the manufacturer.

Unless stated otherwise, the air tightness was determined according to EN 1026 with respect to the joint length under climate load in conjunction with EN 1121 for the closed, non-locked door. The result corresponds at least to air-tightness class 3 according to EN 12207.



The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.


Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Frame values			Frame width b_f mm	U-value frame U_f W/(m ² K)	Ψ -glass edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Top	(to)		145	1.10	0.000	-
Threshold	(th)		96	1.50	0.000	-
Hinge side Door	(hs)		239	1.10	0.000	-
Lock side Door	(ls)		239	1.10	0.000	-
			Spacer: -	Secondary seal: -		



 **Top**


$b_f = 145.00$ mm
 $U_f = 1.10$ W/(m² K)
 $\Psi_g = 0.000$ W/(m K)
 $f_{Rsi} = -$



 **Threshold**


$b_f = 96.00$ mm
 $U_f = 1.50$ W/(m² K)
 $\Psi_g = 0.000$ W/(m K)
 $f_{Rsi} = -$



 **Hinge side**
Door

$b_f = 239.00$ mm
 $U_f = 1.10$ W/(m² K)
 $\Psi_g = 0.000$ W/(m K)
 $f_{Rsi} = -$


 **Lock side**
Door

$b_f = 239.00$ mm
 $U_f = 1.10$ W/(m² K)
 $\Psi_g = 0.000$ W/(m K)
 $f_{Rsi} = -$

Formwork blocks side (operable)


$$U_1 = 0.15 \text{ [W/(m}^2 \text{ K)]}$$

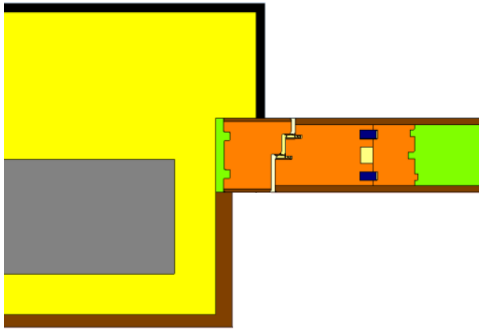

$$\Psi_{\text{install}} = -0.00 \text{ W/(m K)}$$

Insulated formwork blocks


$$U_1 = 0.15 \text{ [W/(m}^2 \text{ K)]}$$

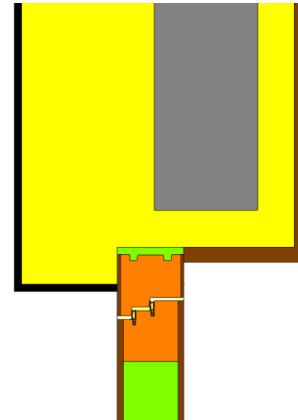

$$\Psi_{\text{install}} = -0.00 \text{ W/(m K)}$$

Timber frame


$$U_1 = 0.12 \text{ [W/(m}^2 \text{ K)]}$$

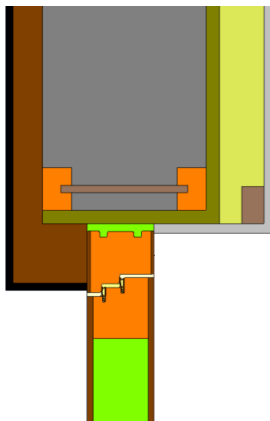

$$\Psi_{\text{install}} = 0.00 \text{ W/(m K)}$$

Lighthweight timber side (operable)


$$U_1 = 0.12 \text{ [W/(m}^2 \text{ K)]}$$

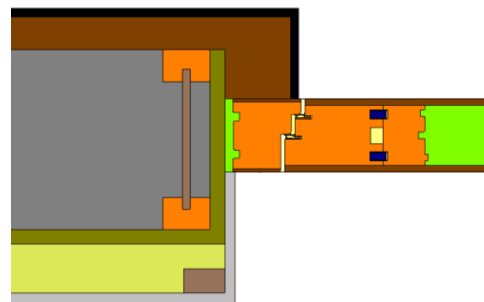

$$\Psi_{\text{install}} = 0.00 \text{ W/(m K)}$$

Threshold entrance door


$$U_1 = 0.13 \quad U_2 = 0.14 \text{ [W/(m}^2 \text{ K)]}$$

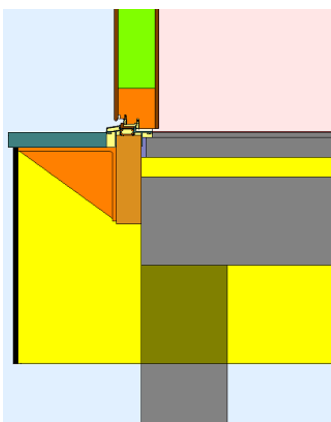

$$\Psi_{\text{install}} = 0.08 \text{ W/(m K)}$$

Exterior insulation and finishing system


$$U_1 = 0.13 \text{ [W/(m}^2 \text{ K)]}$$

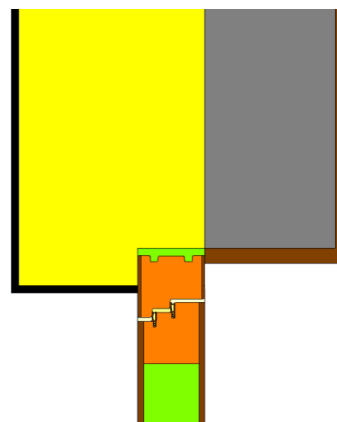

$$\Psi_{\text{install}} = -0.00 \text{ W/(m K)}$$

Exterior insulation and finishing s (EIFS)
side (operable)

$$U_1 = 0.13 \text{ [W/(m}^2 \text{ K)]}$$

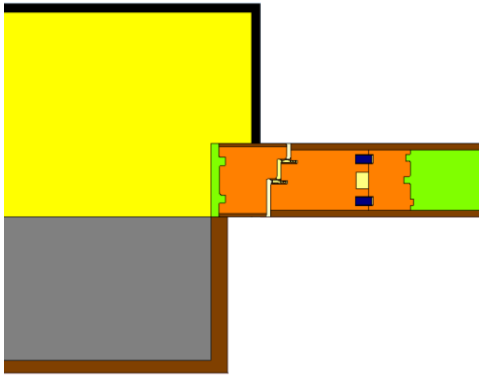

$$\Psi_{\text{install}} = -0.00 \text{ W/(m K)}$$

