


# CERTIFICATE

Certified Passive House Component

Component-ID 1071sk03 valid until 31st December 2017

Passive House Institute  
Dr. Wolfgang Feist  
64283 Darmstadt  
Germany

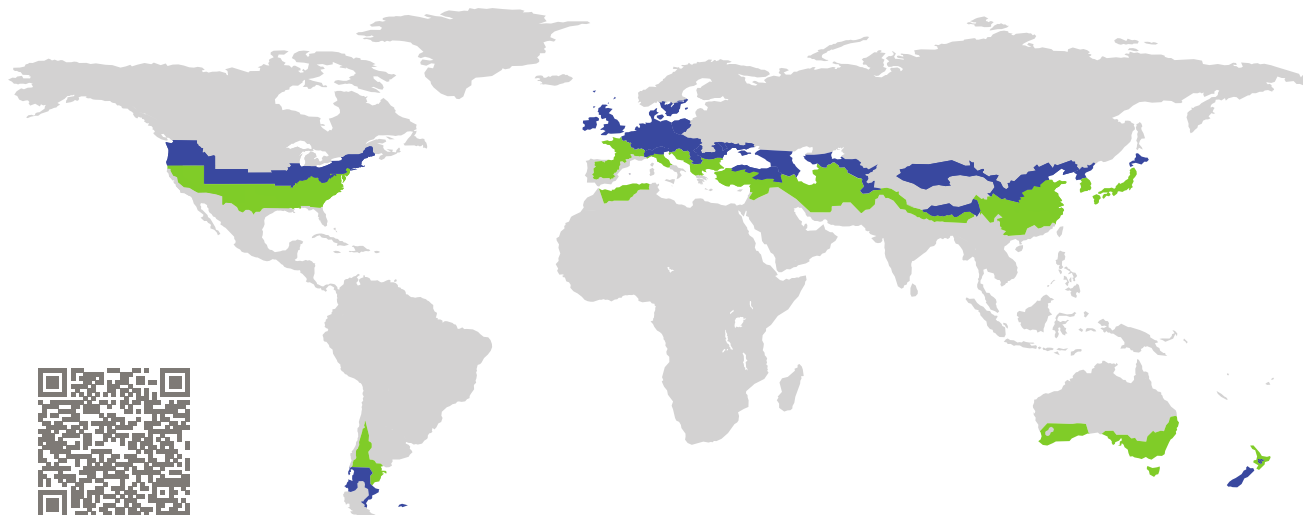


Category: **Skylight**  
Manufacturer: **LAMILUX Heinrich Strunz GmbH,  
Rehau,  
Germany**  
Product name: **LAMILUX CI-System Lichtband B  
energysave**

**This certificate was awarded based on the following  
criteria for the cool, temperate climate zone**

Comfort  $U_{SK} = 0.95 \leq 1.10 \text{ W}/(\text{m}^2 \text{ K})$   
 $U_{SK, \text{installed}} \leq 1.10 \text{ W}/(\text{m}^2 \text{ K})$   
with  $U_g = 0.80 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene  $f_{Rsi=0.25} \geq 0.70$

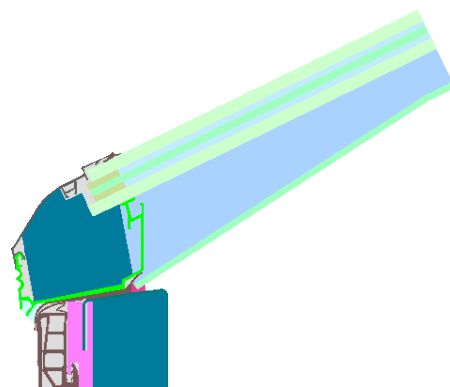

cool, temperate climate



**CERTIFIED  
COMPONENT**

Passive House Institute

Passive House  
efficiency class

phE

phD

phC

phB

phA

[www.passivehouse.com](http://www.passivehouse.com)

## Description

Aluminium frame system insulated by PE-foam (0,038 W/(mK)). the transparent parts consist of cellular polycarbonat boards with air gaps in between. the total thickness is 71 mm, the  $U_g$ -value was determined to 0,80 W/(mK). Does the height of the gable exceed 25 cm, the additional areas have to be taken into account with  $U = 0,74$  W/(m<sup>2</sup>K). Rebate depth: 26 mm, spacer: Non.

## Explanation

The window U-values were calculated for the test window size of 2.46 m × 1.48 m with  $U_g = 0.80$  W/(m<sup>2</sup> K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.80				W/(m <sup>2</sup> K)
		↓	↓	↓	↓	
Window	$U_{SK} =$	0.95	0.87	0.87	0.87	W/(m <sup>2</sup> K)

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on [www.passivehouse.com](http://www.passivehouse.com) and [passipedia.org](http://passipedia.org).

Frame values			Frame width $b_f$ mm	U-value frame $U_f$ W/(m <sup>2</sup> K)	$\Psi$ -glass edge $\Psi_g$ W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Top fixed	(tof)		82	1.65	-0.006	0.70
Side fixed	(sf)		118	2.10	-0.001	0.70
Bottom fixed	(bof)		82	1.65	-0.006	0.70
Mullion fixed	(m)		60	0.81	0.003	0.74
Mullion fixed Variant 1	(m)		38	0.88	0.002	0.75
Spacer: -			Secondary seal: -			

### Validated installations

