


# CERTIFICATE

Certified Passive House Component

Component-ID 0892wi03 valid until 31st December 2020

Passive House Institute  
Dr. Wolfgang Feist  
64283 Darmstadt  
Germany

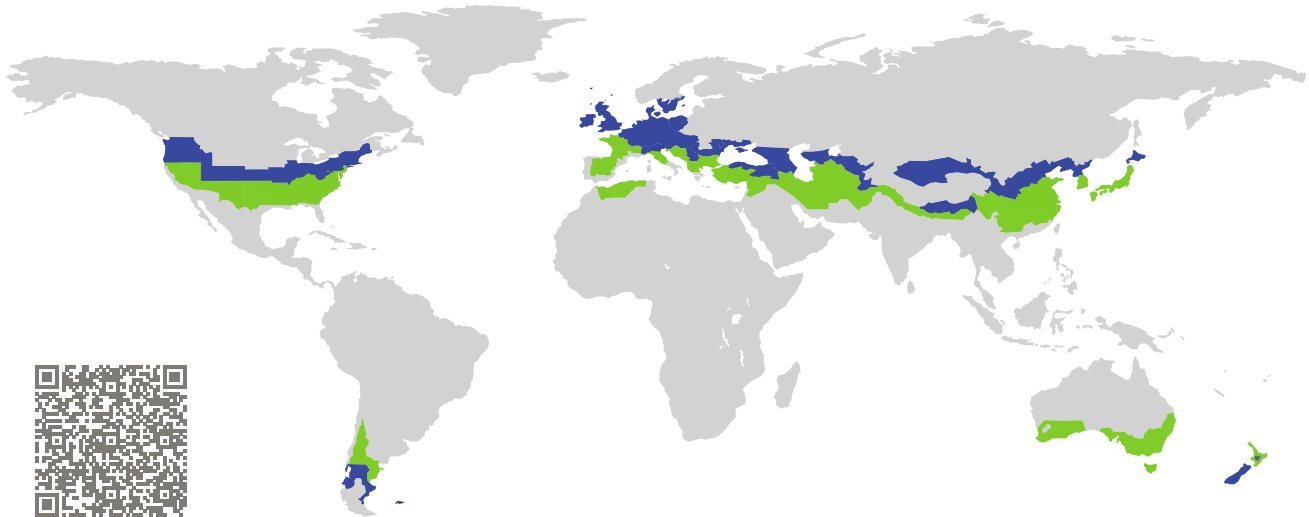


Category: **Window Frame**  
Manufacturer: **MENUISERIE BADER,**  
**Hesingue,**  
**France**  
Product name: **BADER PASSIV BOIS-ALU 112**

**This certificate was awarded based on the following criteria for the cool, temperate climate zone**

Comfort  $U_W = 0.80 \leq 0.80 \text{ W}/(\text{m}^2 \text{ K})$   
 $U_{W,\text{installed}} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$   
with  $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene  $f_{Rsi=0.25} \geq 0.70$

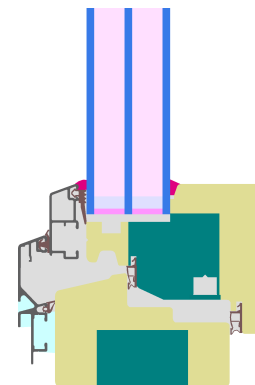

Passive House  
efficiency class

phE

phD

phC

phB


phA

cool, temperate climate



**CERTIFIED  
COMPONENT**

Passive House Institute

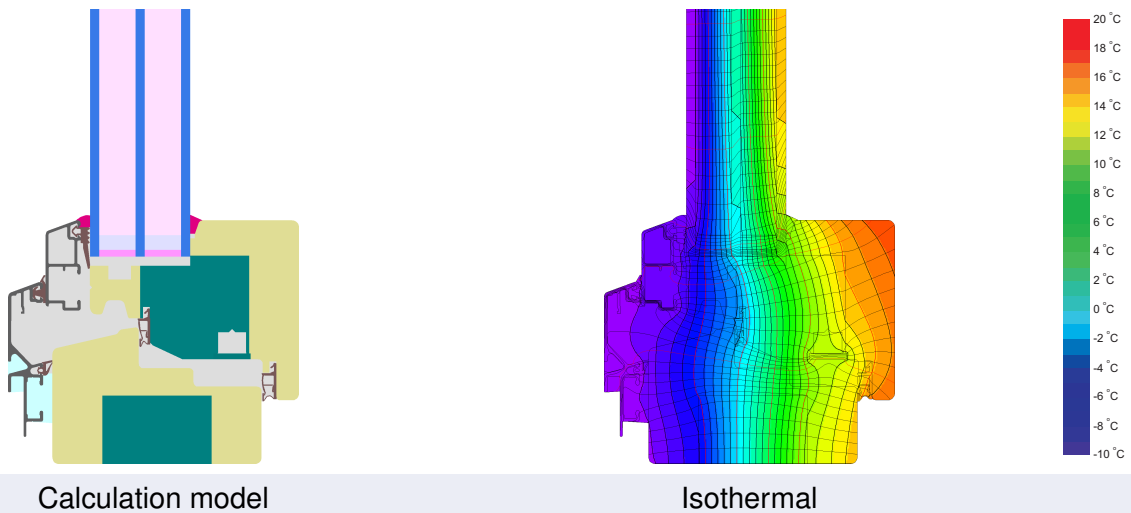

**Description**

Timber frame with insulation (0,043 W/(mK)) and external aluminium shell Pane thickness: 44 mm (4/16/4/16/4), rebate depth: 16 mm

**Explanation**





The window U-values were calculated for the test window size of 1.23 m × 1.48 m with  $U_g = 0.70$  W/(m<sup>2</sup> K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.70	0.64	0.58	0.52	W/(m <sup>2</sup> K)
		↓	↓	↓	↓	
Window	$U_W =$	0.80	0.76	0.72	0.67	W/(m <sup>2</sup> K)

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.


Further information relating to certification can be found on [www.passivehouse.com](http://www.passivehouse.com) and [passipedia.org](http://passipedia.org).

Frame values			Frame width $b_f$ mm	U-value frame $U_f$ W/(m <sup>2</sup> K)	$\Psi$ -panel edge $\Psi_g$ W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Top	(to)		107	0.82	0.026	0.70
Side	(s)		107	0.82	0.026	0.70
Bottom	(bo)		107	0.84	0.026	0.70
Mullion flying	(fm)		130	0.79	0.027	0.70
			Spacer: SWISSPACER Ultimate		Secondary seal: Polysulfid	

### Validated installations

**EIFS**

$U_{Wall} = 0.13 \text{ W/(m}^2 \text{ K)}$

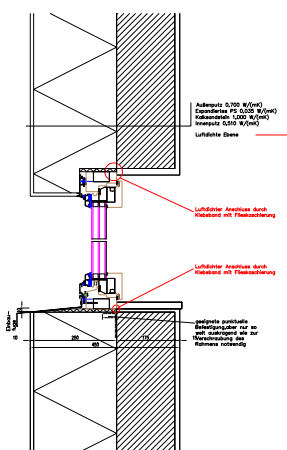

Adhesive: 0.200 W/(m<sup>2</sup>)  
 Extruded EPS: 0.020 W/(m<sup>2</sup>)  
 Composite PE: 0.020 W/(m<sup>2</sup>)  
 Mineral-wool: 0.020 W/(m<sup>2</sup>)  
 Air-tightness: 0.020 W/(m<sup>2</sup>)  
 Secondary seal: 0.020 W/(m<sup>2</sup>)

Luftdichte Ebene

Luftdichter Anschluss durch Hebelwerk mit Flammabdichtung

Luftdichter Anschluss durch Hebelwerk mit Flammabdichtung


Belastete punktförmige Auflagerpunkte auf der Mauerwerksoberfläche mit Hebelwerk verbinden

$\Psi_{install}$	W/(m K)
Top	0.012
Side	0.012
Bottom	0.015

$U_{W,installed} = 0.84 \text{ W/(m}^2 \text{ K)}$

**Insulated formwork blocks**

$U_{Wall} = 0.15 \text{ W/(m}^2 \text{ K)}$

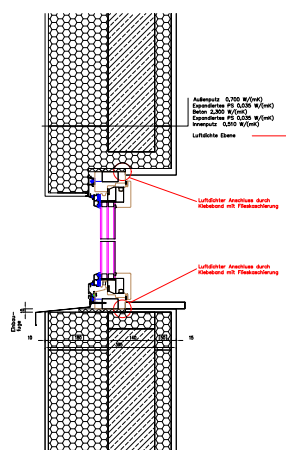

Adhesive: 0.200 W/(m<sup>2</sup>)  
 Extruded EPS: 0.020 W/(m<sup>2</sup>)  
 Composite PE: 0.020 W/(m<sup>2</sup>)  
 Mineral-wool: 0.020 W/(m<sup>2</sup>)  
 Air-tightness: 0.020 W/(m<sup>2</sup>)  
 Secondary seal: 0.020 W/(m<sup>2</sup>)

Luftdichte Ebene

Luftdichter Anschluss durch Hebelwerk mit Flammabdichtung


Luftdichter Anschluss durch Hebelwerk mit Flammabdichtung

$\Psi_{install}$	W/(m K)
Top	0.013
Side	0.013
Bottom	0.016

$U_{W,installed} = 0.84 \text{ W/(m}^2 \text{ K)}$

**Timber frame**

$U_{Wall} = 0.13 \text{ W/(m}^2 \text{ K)}$

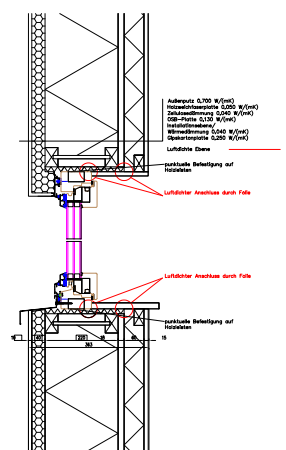

Adhesive: 0.200 W/(m<sup>2</sup>)  
 Extruded EPS: 0.020 W/(m<sup>2</sup>)  
 Composite PE: 0.020 W/(m<sup>2</sup>)  
 Mineral-wool: 0.020 W/(m<sup>2</sup>)  
 Air-tightness: 0.020 W/(m<sup>2</sup>)  
 Secondary seal: 0.020 W/(m<sup>2</sup>)

Luftdichte Ebene

Luftdichter Anschluss durch Hebelwerk mit Flammabdichtung

Luftdichter Anschluss durch Hebelwerk mit Flammabdichtung

Luftdichte Befestigung auf Holzbohle

Luftdichte Befestigung auf Holzbohle

$\Psi_{install}$	W/(m K)
Top	0.015
Side	0.015
Bottom	0.017

$U_{W,installed} = 0.85 \text{ W/(m}^2 \text{ K)}$

