

Certificate

Certified Passive House Component

for cool, temperate climate, valid until 31.12.2016

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
GERMANY

Category: **Curtain Wall**
 Manufacturer: **Aluprof S.A.**
43-300 Bielsko-Biała, POLAND
 Product name: **MB-SR50N HI+**

The following comfort criteria were used in awarding this certificate:

Given a U_g value of $0.70 \text{ W}/(\text{m}^2\text{K})$ and an element size of 1.20 m by 2.50 m ,

$$U_{CW} = 0.80 \text{ W}/(\text{m}^2\text{K}) \leq 0.80 \text{ W}/(\text{m}^2\text{K})$$

Taking into account the installation based thermal bridges, and provided that the installation is, with regard to the thermal bridges, equal or better than shown in the data sheet, the facade meets the following criterion.


$$U_{CW, \text{installed}} \leq 0.85 \text{ W}/(\text{m}^2\text{K})$$

Thermal data of the construction


	U_f -value [W/(m ² K)]	Width [mm]	Ψ_g [W/(mK)]	$f_{Rsi=0.25}$ [-]
Spacer			ULTIMATE Swisspacer S.HD*	
Transom (t)	0.94	50	0.032	0.83
Mullion (m)	0.97	50	0.032	
Thermal glass carrier bridge χ_{GT} [W/K]:				0.004

*Spacers of lower thermal quality, especially those made of aluminium, lead to significantly higher thermal losses and lower temperature factors.

Further information see data sheet

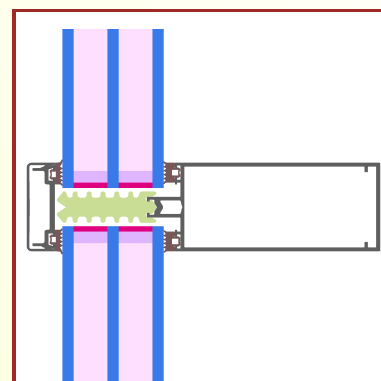


Passive House Efficiency Class

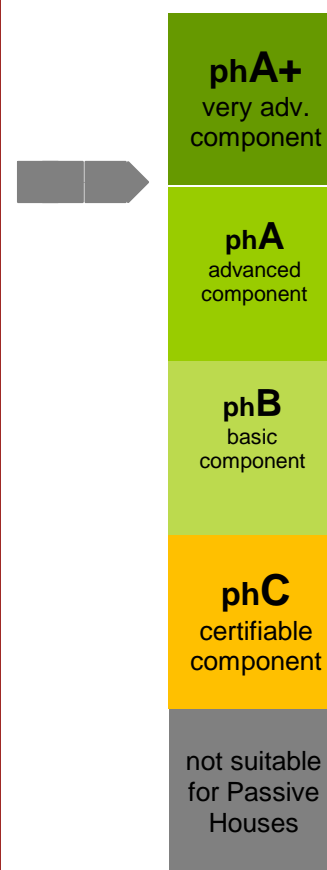

Data Sheet Aluprof S.A., MB-SR50N HI+

Manufacturer Aluprof S.A.
43-300 Bielsko-Biała, POLAND

www.aluprof.eu

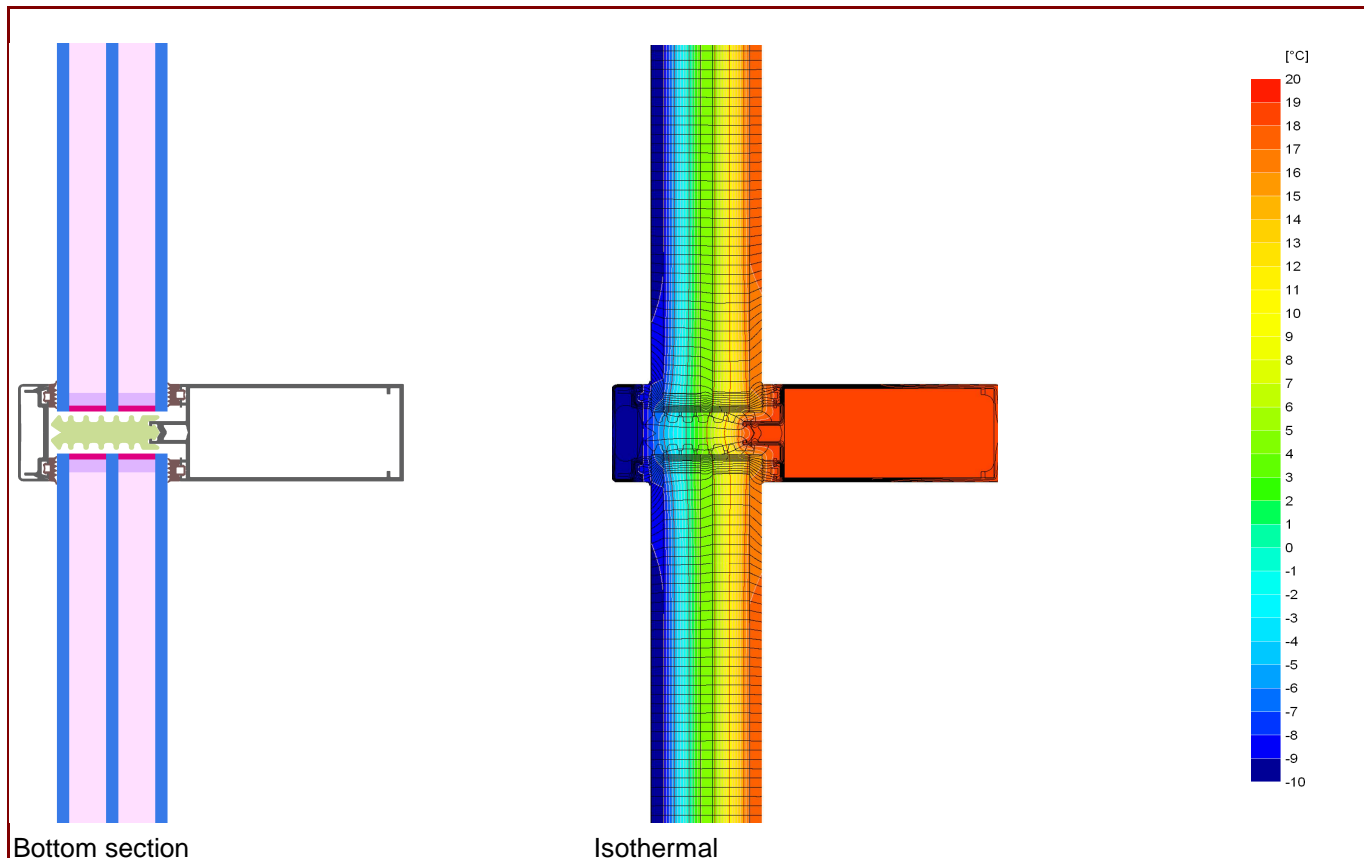

Description

Mullion and transom facade of aluminium. Aluminium cover- and pressure- strip. PE foam insulator inside of the rebate (0.035 W/(mK). Used Pane: 54 mm (6/18/6/18/6), intersection of the Glass: 14 mm. Used spacer: ULTIMATE Swisspacer with silicone secondary sealing


Thermal data

	U_f -value ¹ [W/(m²K)]	Width [mm]	Ψ_g [W/(mK)]	$f_{Rsi=0.25}$ [-]
Spacer			ULTIMATE Swisspacer S.HD*	
Transom (t)	0.94	50	0.032	0.83
Mullion (m)	0.97	50	0.032	
-				
-				
Thermal glass carrier bridge χ_{GT} [W/K]:				0.0040
1: Includes $\Delta U = 0.28$ W/(m²K), determined by 3D thermal flux simul. (PHI)				
2: nonmetallic including bolting				

* Spacers of lower thermal quality leading to higher thermal losses and lower temperatures.

Data Sheet Aluprof S.A., MB-SR50N HI+

Installation

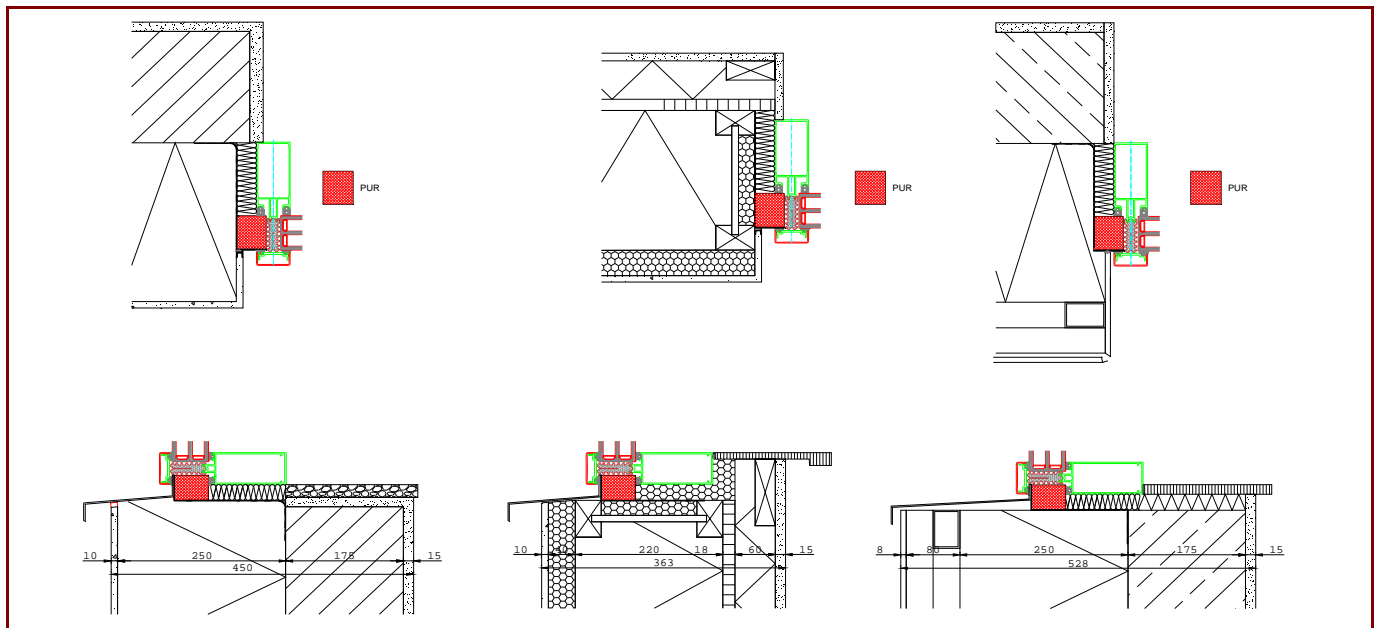

Installation based thermal bridge $\Psi_{instal.}$ in Passive House suitable walls

		EIFS	Timber construction wall	Ventilated facing
Position				
Bottom	[W/(mK)]	0.026	0.049	0.024
Side/top	[W/(mK)]	0.024	0.035	0.033
$U_{CW,instaled}$	[W/(m ² K)]	0.83	0.84	0.83

Explanatory notes

The facade-U-values were calculated based on a 1.20 m by 2.50 m element $U_g = 0.70$ W/(m²K).
If better glazing is used, the facade-U-value decrease as follow:

U Glazing	U_g [W/(m²K)]	0.66	0.60	0.57
U Facade	U_{CW} [W/(m²K)]	0.75	0.70	0.67

Depending on the thermal losses through opaque elements, transparent components are categorised according to efficiency classes. These thermal losses include the losses through the frame, multiplied by its width, the thermal bridge at the edge bond as well as the length of the edge bond.

Please ask the manufacturer for a detailed report containing all calculations and results.

For further information, please visit www.passivehouse.com or www.passipedia.org.