


CERTIFICATE

Certified Passive House Component

Component-ID 1434wi03 valid until 31st December 2025

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

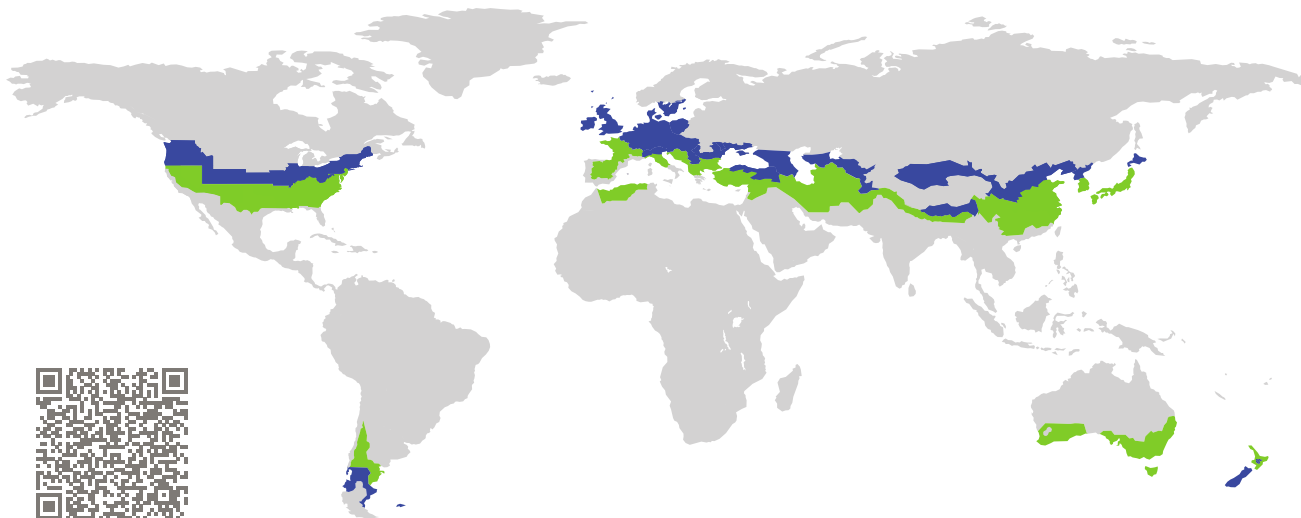


Category: **Window Frame**
Manufacturer: **EuroFinestra s.a.s.,
Governolo di Roncoferraro,
Italy**
Product name: **ZEN**

**This certificate was awarded based on the following
criteria for the cool, temperate climate zone**

Comfort $U_W = 0.68 \leq 0.80 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{W, \text{installed}} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g^1 = 0.62 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.70$

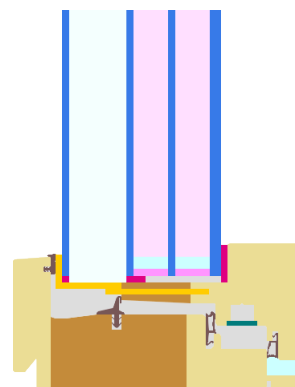

¹The specified U_g value is determined using the reference glazing of the climate zone in conjunction with the additional pane.

Passive House
efficiency class

phE

phD

phC

phB


phA

cool, temperate climate



**CERTIFIED
COMPONENT**

Passive House Institute

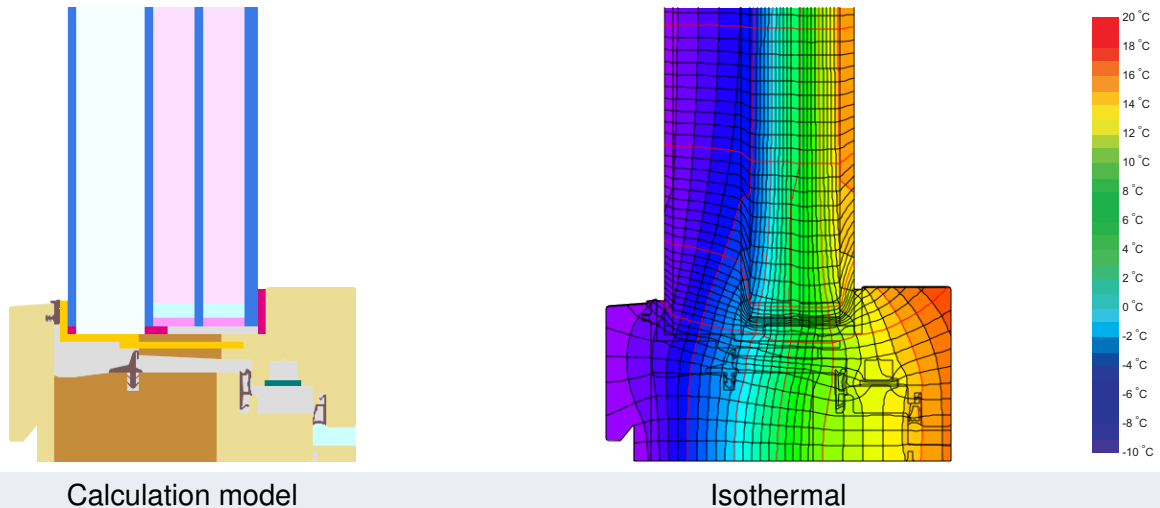

Calculation model

Isothermal

Description

Timber-cork frame (softwood 0,13 W/mK, cork 0,045 W/mK). Frame width 77 mm. Tripe glazing with integral shading in 30 mm air gap: 4/18Ar/4/18Ar/6; additional 4 mm pane to the outside. Spacer: Super Spacer TriSeal / T-Spacer Premium with polysulfide secondary seal.

Explanation

The window U-values were calculated for the test window size of 1.23 m × 1.48 m with $U_g = 0.70$ W/(m² K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing ²	$U_g =$	0.70	0.64	0.58	0.52	W/(m ² K)
		↓	↓	↓	↓	
Window	$U_w =$	0.68	0.65	0.61	0.57	W/(m ² K)




Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.





The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

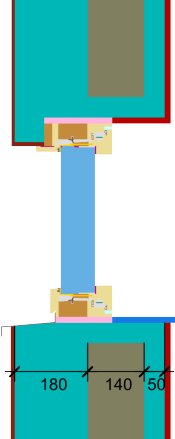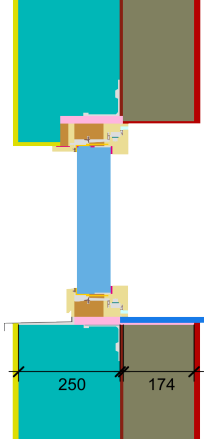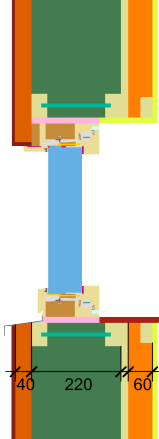²The specified U_g values refer to the thermally decisive glazing.

Validated installations

Formwork blocks (operable)	Exterior insulation and finishing system	Lightweight timber (operable)
$U_{\text{Wall}} = 0.15 \text{ W}/(\text{m}^2 \text{ K})$	$U_{\text{Wall}} = 0.13 \text{ W}/(\text{m}^2 \text{ K})$	$U_{\text{Wall}} = 0.13 \text{ W}/(\text{m}^2 \text{ K})$
		
Ψ_{install} W/(m K)	Ψ_{install} W/(m K)	Ψ_{install} W/(m K)
Top 0.004	Top 0.019	Top 0.013
Side 0.004	Side 0.019	Side 0.013
Bottom 0.012	Bottom 0.042	Bottom 0.019
$U_{W,\text{installed}} = 0.70 \text{ W}/(\text{m}^2 \text{ K})$	$U_{W,\text{installed}} = 0.76 \text{ W}/(\text{m}^2 \text{ K})$	$U_{W,\text{installed}} = 0.73 \text{ W}/(\text{m}^2 \text{ K})$

Frame values		Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ -glazing edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Flying Mullion (FM1)		100	0.62	0.026	0.77
Bottom (OB1)		77	0.55	0.028	0.77
Top (OH1)		77	0.54	0.041	0.75
Lateral (OJ1)		77	0.54	0.028	0.77
Spacer: Super Spacer TriSeal / T-Spacer Premium			Secondary seal: Polysulfide		

