


# CERTIFICATE

Certified Passive House Component

Component-ID 2082cw03 valid until 31st December 2025

Passive House Institute  
Dr. Wolfgang Feist  
64283 Darmstadt  
Germany

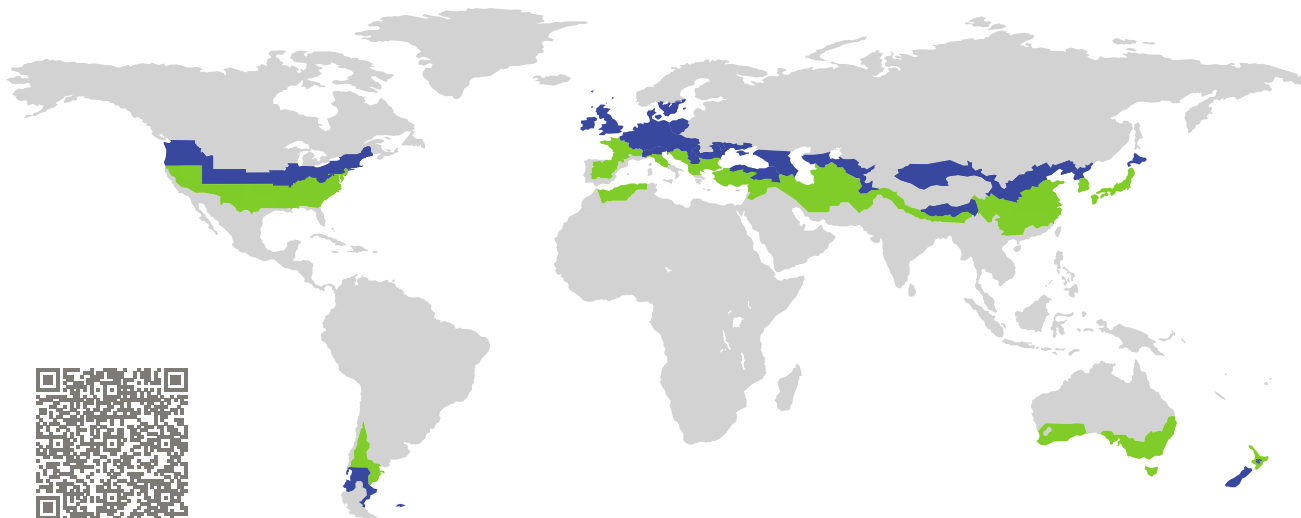


Category: **Curtain Wall**  
Manufacturer: **SCHÜCO International KG,  
Bielefeld,  
Germany**  
Product name: **AOC 60 ST**

**This certificate was awarded based on the following  
criteria for the cool, temperate climate zone**

Comfort  $U_{CW=0.80} \leq 0.80 \text{ W}/(\text{m}^2 \text{ K})$   
 $U_{CW,installed} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$   
with  $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene  $f_{Rsi=0.25} \geq 0.70$

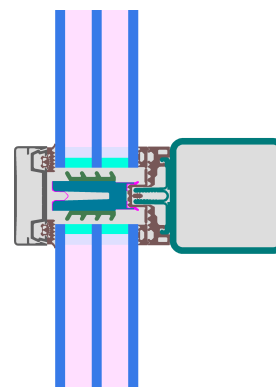

Passive House  
efficiency class

phE

phD

phC

phB


phA

cool, temperate climate



**CERTIFIED  
COMPONENT**

Passive House Institute

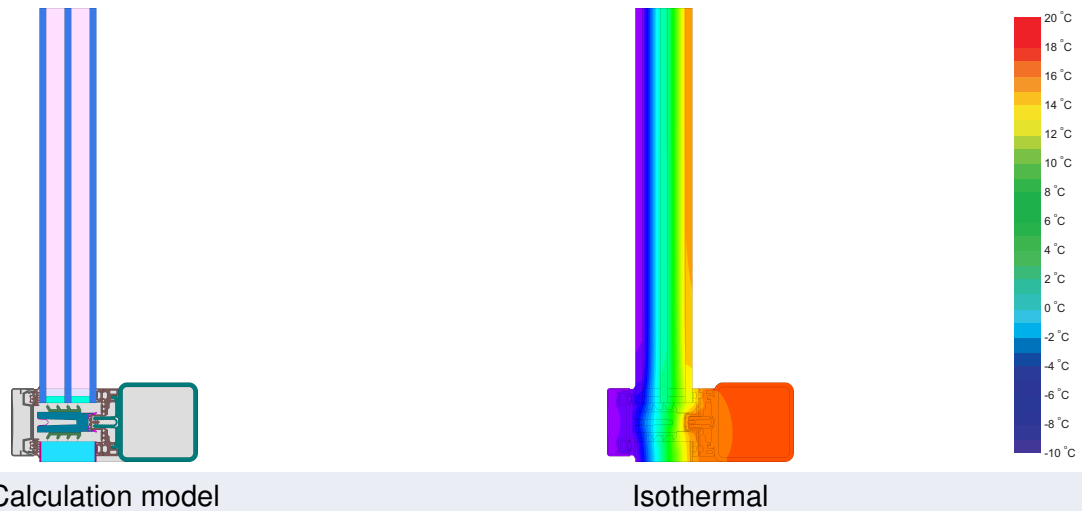

**Description**

steel curtain wall; reduction of radiation losses by way of blank aluminium pressure plate; insulator made from XPET, PE and PE-foam Pane thickness: 50 mm (6/16/6/16/6), rebate depth: 13 mm. Spacer: SWISSPACER Ultimate with butyl as secondary seal.

**Explanation**






The element U-values were calculated for the test element size of 1.20 m × 2.50 m with  $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$ . If a higher quality glazing is used, the element U-values will improve as follows:

Glazing	$U_g =$	0.70	0.68	0.56	0.52	$\text{W}/(\text{m}^2 \text{ K})$
		↓	↓	↓	↓	
Element	$U_{CW}$	0.80	0.78	0.67	0.63	$\text{W}/(\text{m}^2 \text{ K})$

Transparent building components are sorted into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components that have been certified for climate zones with higher thermal requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.




Further information relating to certification can be found on [www.passivehouse.com](http://www.passivehouse.com) and [passipedia.org](http://passipedia.org).

Frame values			Frame width $b_f$ mm	$U$ -value frame $U_f$ <sup>1</sup> W/(m <sup>2</sup> K)	$\Psi$ -glazing edge $\Psi_g$ W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Mullion fixed	(OM1)		60	0.87	0.035	0.78
Transom fixed	(OT1)		60	0.87	0.035	2.78
Bottom fixed	(FB1)		65	0.84	0.036	0.78
Top fixed	(FH1)		65	0.84	0.035	0.78
Lateral fixed	(FJ1)		65	0.85	0.035	0.78

Spacer: SWISSPACER ULTIMATE      Secondary seal: Butyl

Thermal glass carrier bridge<sup>2</sup>  $\chi_{GT} = 0.004$  W/K

### Validated installations

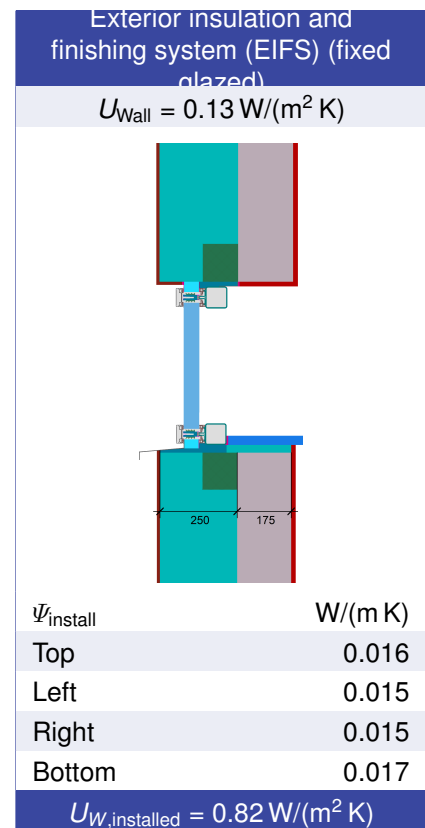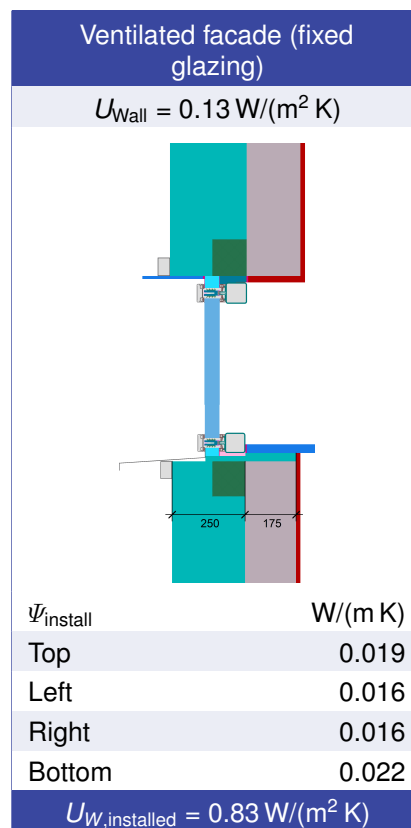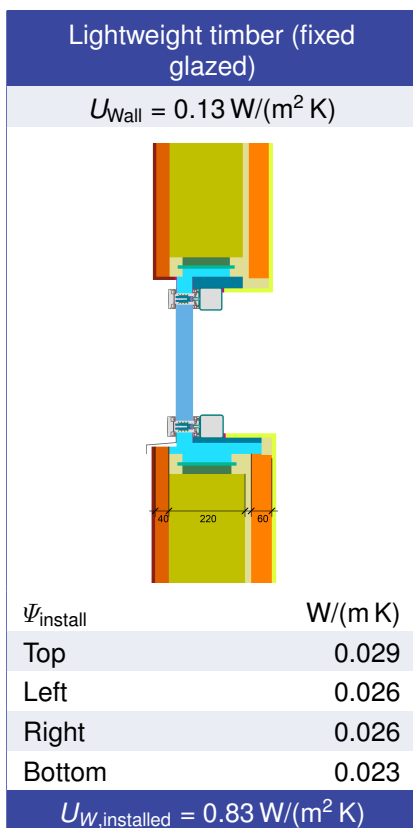

<sup>1</sup> Includes  $\Delta U = 0.22$  W/(m<sup>2</sup> K). Determined through measurement

<sup>2</sup> Standard value. Glass carrier type: Non-metallic

