


CERTIFICATE

Certified Passive House Component

Component-ID 1432wi04 valid until 31st December 2025

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

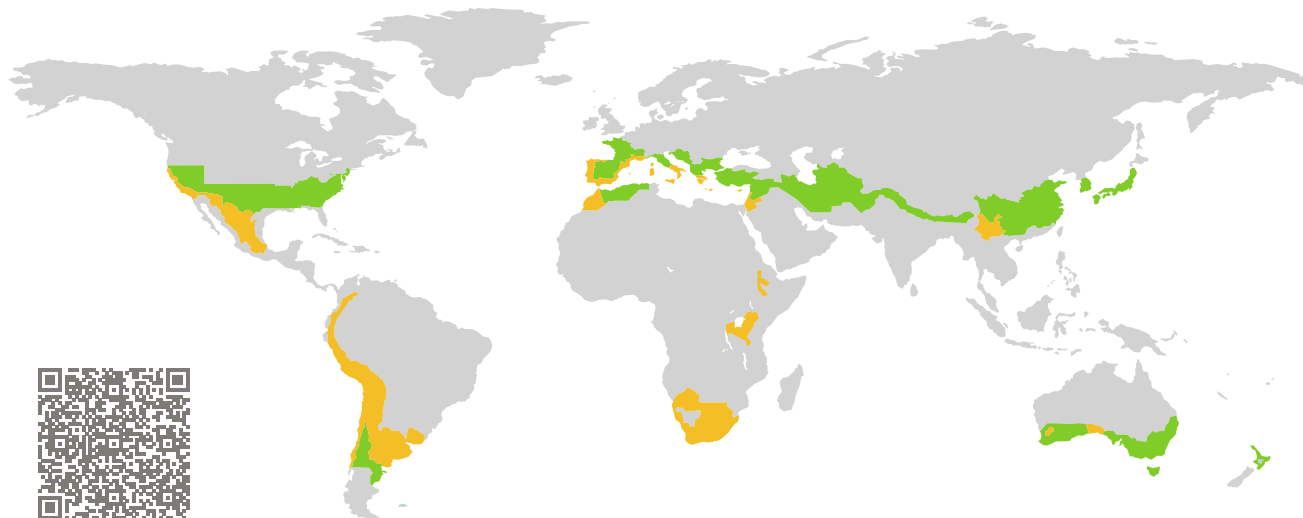


Category: **Window Frame**
Manufacturer: **Carpinteria Cobian,
Piloña,
Spain**
Product name: **COSISVEN LUX MX92**

**This certificate was awarded based on the following
criteria for the warm, temperate climate zone**

Comfort $U_W = 1.00 \leq 1.00 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{W, \text{installed}} \leq 1.05 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 0.90 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.65$

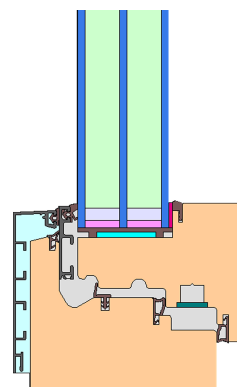

warm, temperate climate



ph B

**CERTIFIED
COMPONENT**

Passive House Institute

Passive House
efficiency class

phE


phD

phC

phB

phA

www.passivehouse.com

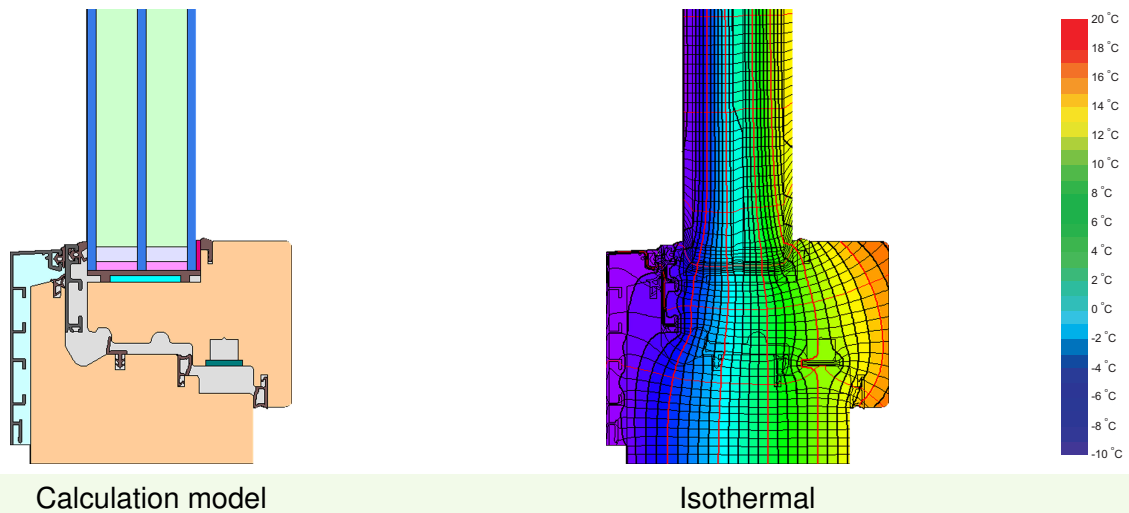

Calculation model Isothermal

Description

Timberframe (laminated pine 450kg/m³, 0.12 W/(mK)) with aluminum facing shell. Pane thickness: 50 mm (6/18/4/18/4), rebate depth: 13 mm.

Explanation

The window U-values were calculated for the test window size of 1.23 m × 1.48 m with $U_g = 0.90$ W/(m² K). If a higher quality glazing is used, the window U-values will improve as follows:




Glazing	$U_g =$	0.90	0.70	0.64	0.62	W/(m ² K)
		↓	↓	↓	↓	
Window	$U_W =$	1.00	0.85	0.81	0.79	W/(m ² K)





Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

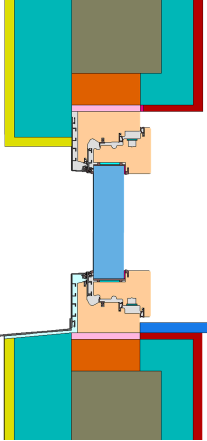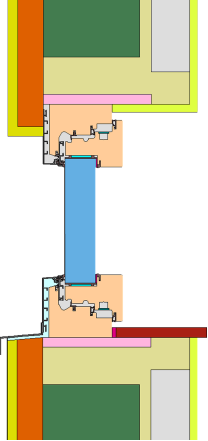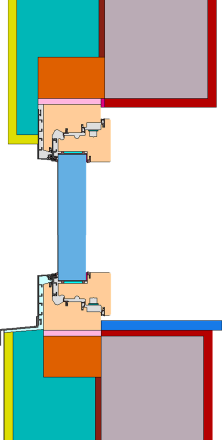Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Validated installations

Formwork blocks (operable)		Lightweight timber (operable)		Exterior insulation and finishing system (EIFS) (operable)	
$U_{\text{Wall}} = 0.23 \text{ W}/(\text{m}^2 \text{ K})$		$U_{\text{Wall}} = 0.22 \text{ W}/(\text{m}^2 \text{ K})$		$U_{\text{Wall}} = 0.23 \text{ W}/(\text{m}^2 \text{ K})$	
					
Ψ_{install}	W/(m K)	Ψ_{install}	W/(m K)	Ψ_{install}	W/(m K)
Top	0.010	Top	0.007	Top	0.006
Side	0.010	Side	0.007	Side	0.006
Bottom	0.020	Bottom	0.010	Bottom	0.013
$U_{W,\text{installed}} = 1.04 \text{ W}/(\text{m}^2 \text{ K})$		$U_{W,\text{installed}} = 1.02 \text{ W}/(\text{m}^2 \text{ K})$		$U_{W,\text{installed}} = 1.02 \text{ W}/(\text{m}^2 \text{ K})$	

Frame values			Frame width	U-value frame	Ψ -glazing edge	Temp. Factor
			b_f	U_f	Ψ_g	$f_{Rsi=0.25}$
			mm	W/(m ² K)	W/(m K)	[-]
Flying Mulletion	(FM1)		120	1.20	0.025	0.65
Bottom	(OB1)		98	1.03	0.025	0.68
Top	(OH1)		98	1.03	0.025	0.68
Lateral	(OJ1)		98	1.03	0.025	0.68
Spacer: SWISSPACER Ultimate				Secondary seal: Polysulfide		

