


# CERTIFICATE

Certified Passive House Component

Component-ID 1532pm03 valid until 31st December 2021

Passive House Institute  
Dr. Wolfgang Feist  
64283 Darmstadt  
Germany

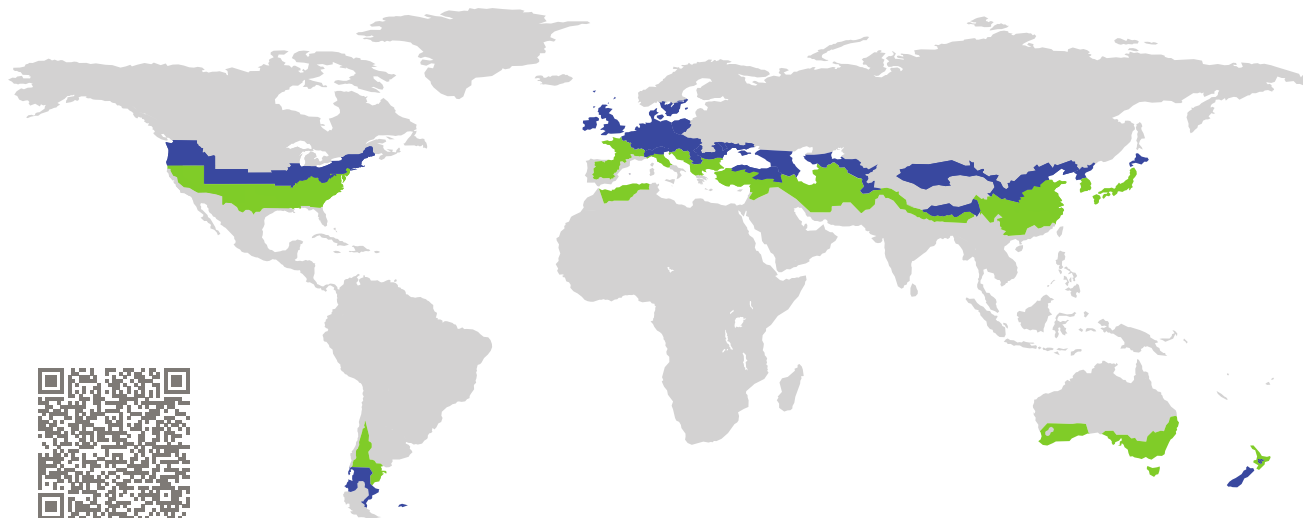

Category: **Window connection**


Manufacturer: **Soudal N.V.,  
Turnhout,  
Belgium**

Product name: **SoudaFrame SWI**

**This certificate was awarded based on the following  
criteria for the cool, temperate climate zone**

Comfort  $U_{W,installed} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$   
with  $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene  $f_{Rsi=0.25} \geq 0.70$

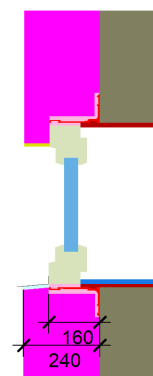

Passive House  
efficiency class

phE

phD

phC

phB


phA

cool, temperate climate



**CERTIFIED  
COMPONENT**

Passive House Institute

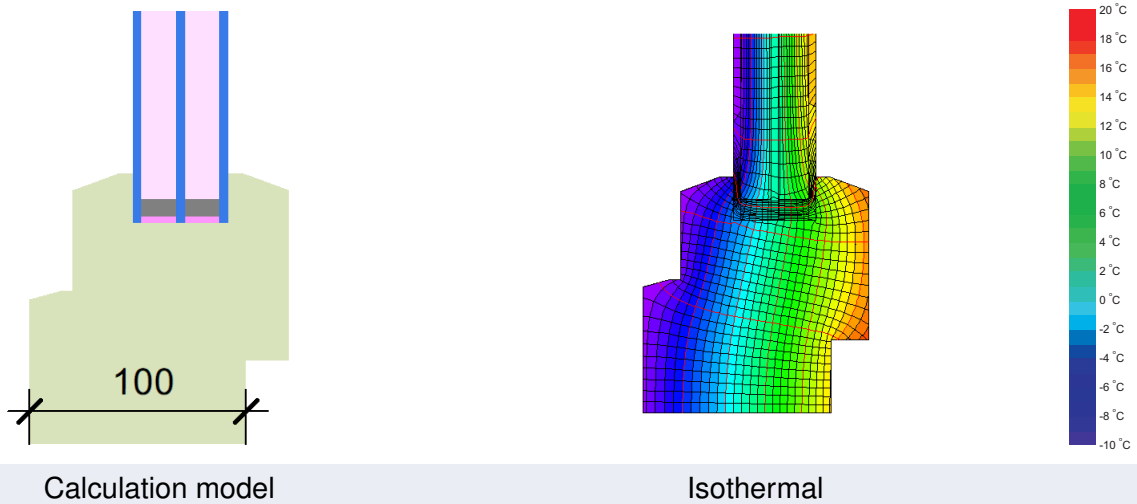

### Description

Window mounting system made from GRP (0,19 W/(mK)), system width 90, 130 160, 200 mm. Assembly by way of adhesive and mechanical fixing. Additional thermal losses by reinforcing brackets made from steel determined by 3D heat flux simulation. Losses are to be included where the load exceeds a certain level, see certification report.

### Explanation




The window U-values were calculated for the test window size of 1.23 m × 1.48 m with  $U_g = 0.70$  W/(m<sup>2</sup> K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.70	0.65	0.65	0.55	W/(m <sup>2</sup> K)
		↓	↓	↓	↓	
Window	$U_W =$	0.80	0.76	0.76	0.69	W/(m <sup>2</sup> K)

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on [www.passivehouse.com](http://www.passivehouse.com) and [passipedia.org](http://passipedia.org).


Frame values			Frame width $b_f$ mm	$U$ -value frame $U_f$ W/(m <sup>2</sup> K)	$\Psi$ -panel edge $\Psi_g$ W/(m K)	Temp. Factor $f_{RSI=0.25}$ [-]
Top	(to)		100	0.73	0.036	0.70
Side	(s)		100	0.73	0.036	0.70
Bottom	(bo)		100	0.73	0.036	0.70

Spacer: PHI pHB-Spacer                      Secondary seal: Polysulfid

### Validated installations

Mounting System Timber/PVC  
completely covered by insul

$U_{Wall} = 0.13 \text{ W}/(\text{m}^2 \text{ K})$

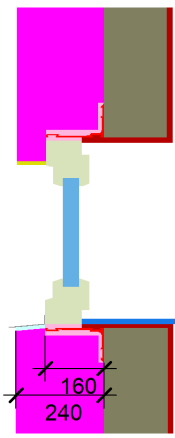


$\Psi_{install}$	W/(m K)
Top	0.002
Side	0.002
Bottom	0.016

$U_{W,installed} = 0.81 \text{ W}/(\text{m}^2 \text{ K})$

Mounting System Timber/PVC  
not covered by insulation

$U_{Wall} = 0.13 \text{ W}/(\text{m}^2 \text{ K})$

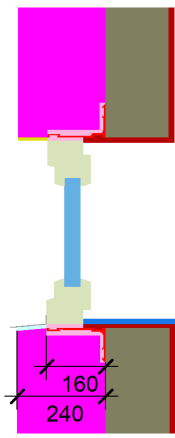


$\Psi_{install}$	W/(m K)
Top	0.016
Side	0.016
Bottom	0.016

$U_{W,installed} = 0.85 \text{ W}/(\text{m}^2 \text{ K})$

Mounting System Timber/PVC  
partially covered by insul

$U_{Wall} = 0.13 \text{ W}/(\text{m}^2 \text{ K})$

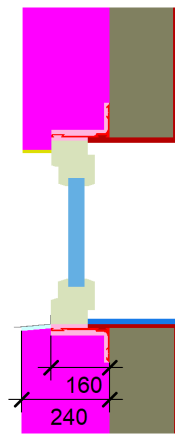

$\Psi_{install}$	W/(m K)
Top	0.010
Side	0.010
Bottom	0.016

$U_{W,installed} = 0.83 \text{ W}/(\text{m}^2 \text{ K})$

