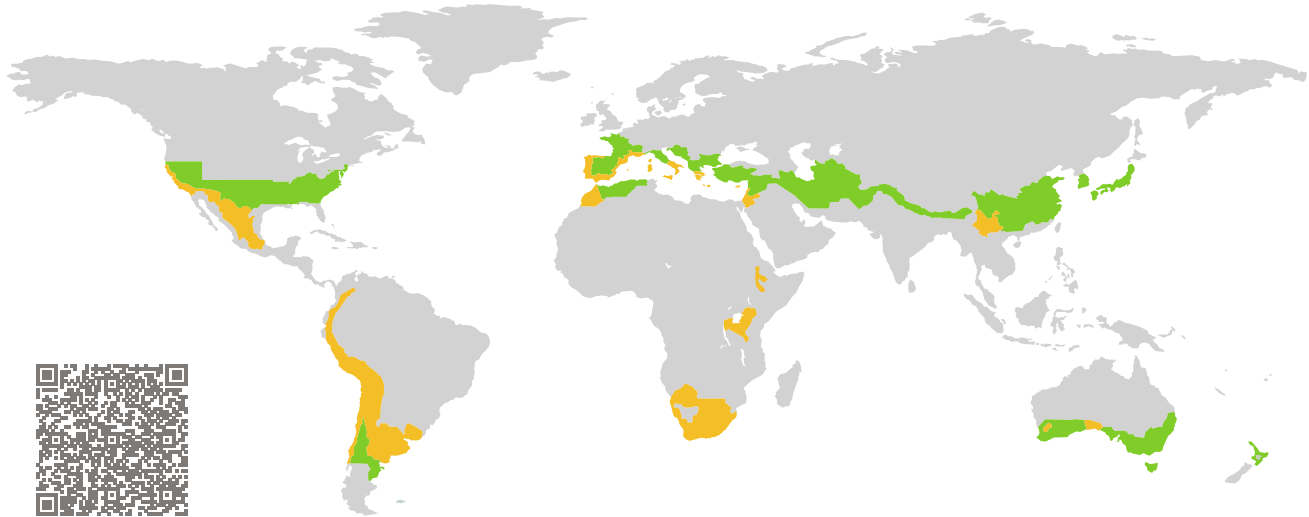


CERTIFICATE

Certified Passive House Component

Component-ID 2360wm04 valid until 31st December 2025

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany



Category: **Window mounting system**
Manufacturer: **CAJAISLANT GRUPO, S.L.U.,
Sentmenat,
Spain**
Product name: **Cajaislant Premarco Térmico©**

This certificate was awarded based on the following criteria for the warm, temperate climate zone

Efficiency $\Delta U \leq 0.05 \text{ W}/(\text{m}^2 \cdot \text{K})$

Hygiene $f_{\text{Rsi} = 0.25} \geq 0.65$

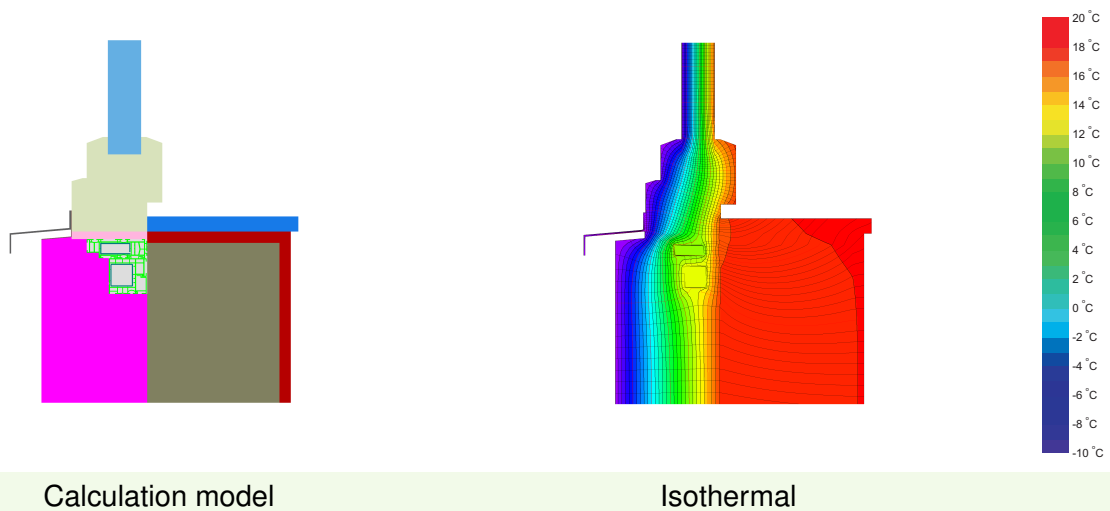


warm, temperate climate



**CERTIFIED
COMPONENT**

Passive House Institute



Description

PVC window mounting system with steel reinforcement.

Explanation

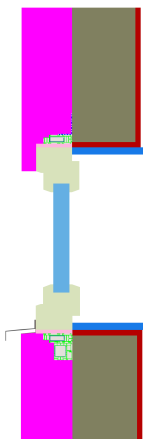
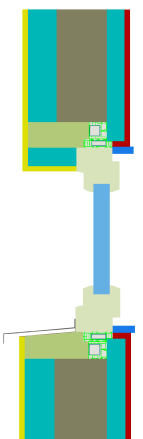
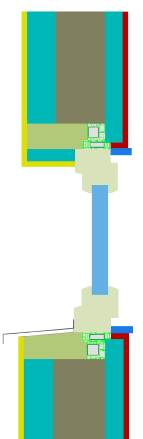
The certifiability is demonstrated by the increase of the heat transfer coefficient ΔU [W/(m².K)] caused by the installation thermal bridge (efficiency criterion) in conjunction with given installation situations and window frames as well as by the minimum temperature factor at the coldest point of the installation connection (hygiene criterion).




The heat transfer coefficients (U-values) and the thermal bridge loss coefficients (ψ -values) of the window are determined on the basis of DIN EN ISO 10077-2, the installation thermal bridges according to ISO 10211.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Validated installations

EIFS Mounting system + timber/PVC frame fully covered by insulation		Formwork blocks Mounting system + timber/PVC frame fully covered by insulation		Formwork blocks - Mounting system + timber/PVC frame partially covered by insulation	
$U_{Wall} = 0.215 \text{ W}/(\text{m}^2 \cdot \text{K})$		$U_{Wall} = 0.251 \text{ W}/(\text{m}^2 \cdot \text{K})$		$U_{Wall} = 0.251 \text{ W}/(\text{m}^2 \cdot \text{K})$	
					
$\Psi_{install}$	W/(m · K)	$\Psi_{install}$	W/(m · K)	$\Psi_{install}$	W/(m · K)
Top	0.008	Top	0.005	Top	0.012
Side	0.008	Side	0.005	Side	0.012
Bottom	0.031	Bottom	0.028	Bottom	0.028
$\Delta U = 0.04 \text{ W}/(\text{m}^2 \cdot \text{K})$		$\Delta U = 0.03 \text{ W}/(\text{m}^2 \cdot \text{K})$		$\Delta U = 0.05 \text{ W}/(\text{m}^2 \cdot \text{K})$	

Frame values		Frame width b_f mm	U-value frame U_f W/(m ² K)	Ψ -glazing edge Ψ_g W/(m K)	Temp. Factor $f_{RSI=0.25}$ [-]
Bottom	(OB1) 	125	0.92	0.038	0.70
Top	(OH1) 	125	0.92	0.038	0.70
Lateral	(OJ1) 	125	0.92	0.038	0.70
Spacer: PHI pHB-Spacer		Secondary seal: Polysulfide			

