


CERTIFICATE

Certified Passive House Component

Component-ID 0971wc03 valid until 31st December 2017

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

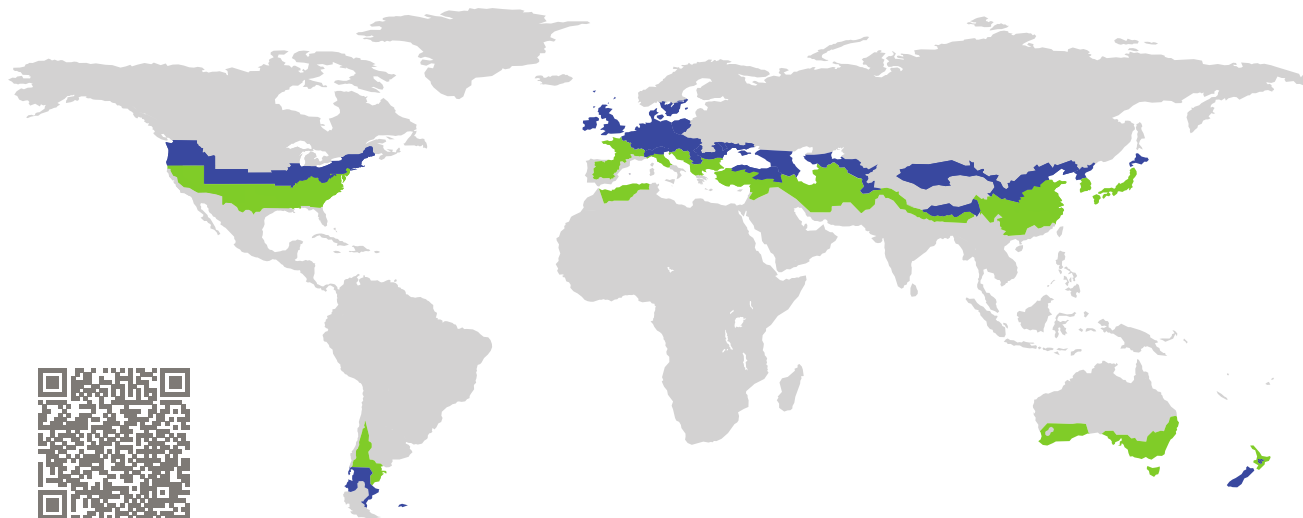

Category: **Window connection**
Manufacturer: **Pflüger TOB GmbH,
Ilshofen-Obersteinach,
Germany**
Product name: **vowatherm - Vorwandmontagewinkel**

**This certificate was awarded based on the following
criteria for the cool, temperate climate zone**

Comfort $U_{W,installed} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.70$



Passive House
efficiency class

phE

phD

phC

phB


phA

cool, temperate climate



**CERTIFIED
COMPONENT**

Passive House Institute

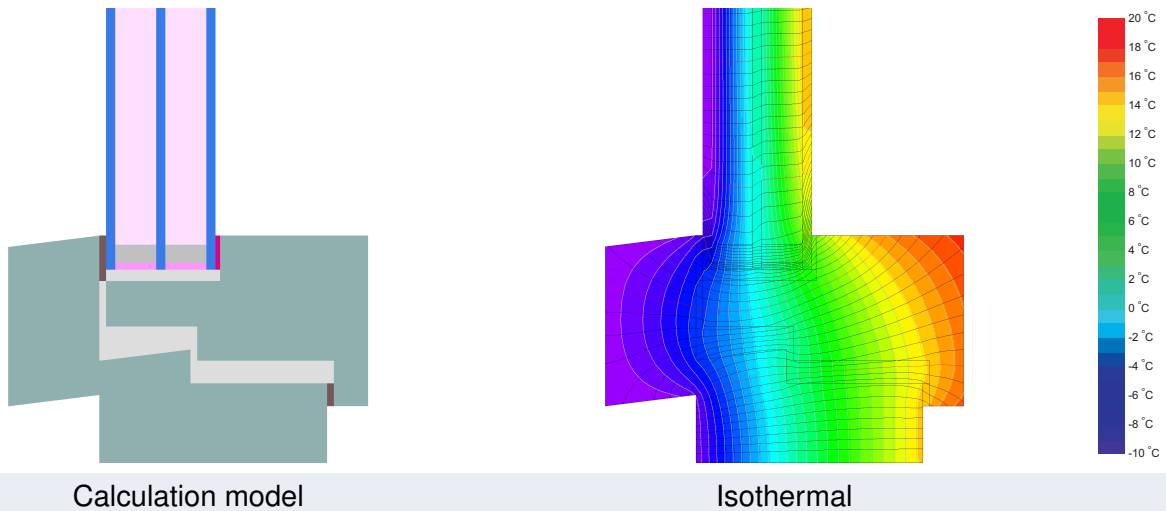

Description

PHI standard timber frame, spruce $\lambda = 0.11 \text{ W/(mK)}$, Pane thickness: 48 mm (4/18/4/18/4) in combination with (see following page) pre-wall mounting angle made of polyurethane hard foam $\lambda = 0.086 \text{ W/(mK)}$

Explanation




The window U-values were calculated for the test window size of $1.23 \text{ m} \times 1.48 \text{ m}$ with $U_g = 0.70 \text{ W/(m}^2 \text{ K)}$. If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.70	0.64	0.58	0.52	W/(m ² K)
		↓	↓	↓	↓	
Window	$U_W =$	0.79	0.75	0.71	0.66	W/(m ² K)

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.


Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Frame values			Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ -glass edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Top	(to)		100	0.82	0.020	0.71
Side	(s)		100	0.82	0.020	0.71
Bottom	(bo)		100	0.97	0.020	0.69
			Spacer: SWISSPACER Ultimate		Secondary seal: Polyurethane	

Validated installations

Ventilated facade (fixed glazing)

$U_{Wall} = 0.13 \text{ W/(m}^2 \text{ K)}$

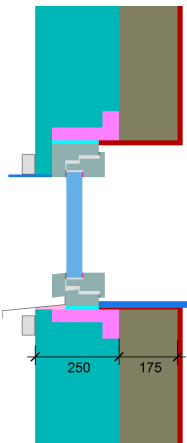


$\Psi_{install}$	W/(m K)
Top	-0.002
Side	-0.002
Bottom	0.025

$U_{W,installed} = 0.81 \text{ W/(m}^2 \text{ K)}$

Exterior insulation and finishing system

$U_{Wall} = 0.13 \text{ W/(m}^2 \text{ K)}$

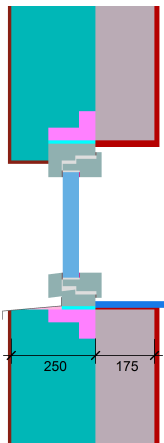


$\Psi_{install}$	W/(m K)
Top	0.006
Side	0.006
Bottom	0.035

$U_{W,installed} = 0.83 \text{ W/(m}^2 \text{ K)}$

Cavity wall

$U_{Wall} = 0.13 \text{ W/(m}^2 \text{ K)}$

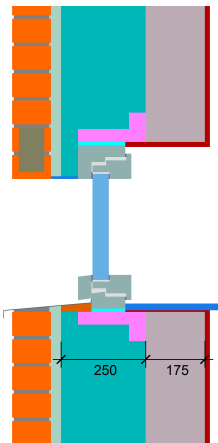

$\Psi_{install}$	W/(m K)
Top	-0.002
Side	-0.002
Bottom	0.021

$U_{W,installed} = 0.80 \text{ W/(m}^2 \text{ K)}$

