


CERTIFICATE

Certified Passive House Component

Component-ID 1462wi05 valid until 31st December 2020

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

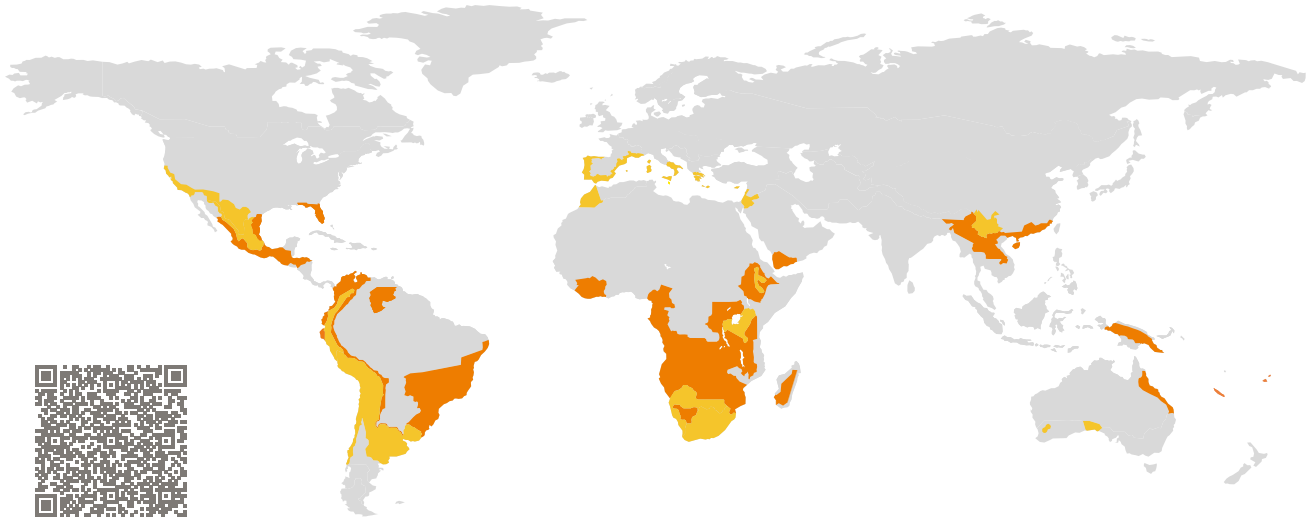


Category: **Window Frame**
Manufacturer: **Hebei Orient Sundar Window Co., Ltd., Gaobeidian City, Hebei Province, China**
Product name: **All Climate Passive 126 W warm**

This certificate was awarded based on the following criteria for the warm climate zone

Comfort $U_W = 1.19 \leq 1.20 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{W,\text{installed}} \leq 1.25 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 1.10 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.55$

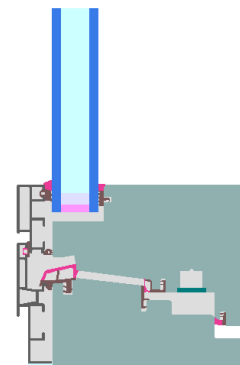

Passive House
efficiency class

phE

phD

phC

phB

phA

www.passivehouse.com


warm climate




phC

**CERTIFIED
COMPONENT**

Passive House Institute

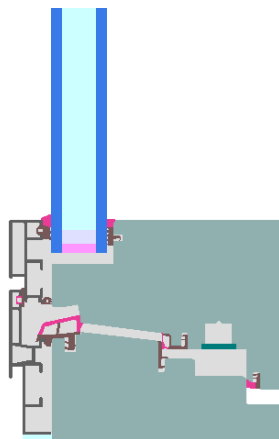

Calculation model

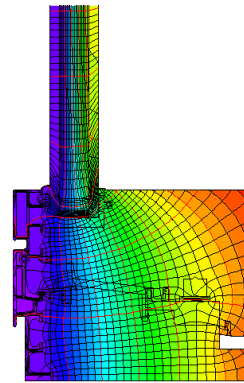

Isothermal

Description

Timber Aluminium (Spruce/fir 0.11 W/(mK)) window frame. Pane thickness: 26 mm (5/16/5/0/0), rebate depth: 15 mm. Spacer: SWISSPACER Ultimate.

Explanation





The window U-values were calculated for the test window size of 1.23 m × 1.48 m with $U_g = 1.10$ W/(m² K). If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	1.10	1.20	1.30	1.40	W/(m ² K)
		↓	↓	↓	↓	
Window	$U_W =$	1.19	1.26	1.33	1.40	W/(m ² K)


Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.


The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.


Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Frame values			Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ -panel edge Ψ_g W/(m K)	Temp. Factor $f_{RSi=0.25}$ [-]
Top	(to)		102	1.07	0.037	0.55
Side	(s)		102	1.07	0.037	0.55
Bottom	(bo)		102	1.07	0.037	0.55
Mullion flying	(fm)		116	1.21	0.037	0.56
			Spacer: Mirkspace OX2	Secondary seal: Mirkdicht VX2		

Validated installations

Lightweight timber (operable)	
$U_{Wall} = 0.48 \text{ W/(m}^2 \text{ K)}$	
	
$\Psi_{install}$	W/(m K)
Top	0.015
Side	0.015
Bottom	0.017
$U_{W,installed} = 1.23 \text{ W/(m}^2 \text{ K)}$	

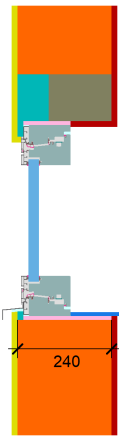Monolithic construction (operable)	
$U_{Wall} = 0.26 \text{ W/(m}^2 \text{ K)}$	
	
$\Psi_{install}$	W/(m K)
Top	0.042
Side	0.015
Bottom	0.015
$U_{W,installed} = 1.25 \text{ W/(m}^2 \text{ K)}$	

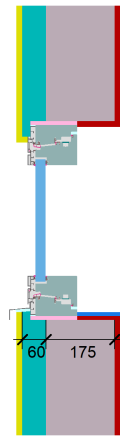Exterior insulation and finishing system (EIFS) (operable)	
$U_{Wall} = 0.48 \text{ W/(m}^2 \text{ K)}$	
	
$\Psi_{install}$	W/(m K)
Top	0.026
Side	0.022
Bottom	0.022
$U_{W,installed} = 1.25 \text{ W/(m}^2 \text{ K)}$	

