


Certificate

valid until 31.12.2019

 **Passivhaus
Institut**
Dr. Wolfgang Feist
Rheinstraße 44/46
D-64283 Darmstadt

Balcony connection

**Low Energy
Component**

**Schöck Isokorb® Type KXT
160-250mm slab thickness**

**Manufacturer: Schöck Bauteile GmbH
Vimbucher Str. 2 76354 Baden-Baden**

The following criteria were used in awarding this certificate:

Efficiency Criterion

In two typical applications^{*)}, the construction is


$$\Delta U_{WB} < 0,025 \quad \text{W}/(\text{m}^2\text{K})$$

Comfort Criterion

The inner surface must be warm enough to prevent mould as well as uncomfortable down-drought and radiation losses.

$$\theta_{i,min} > 17,00 \quad \text{°C}$$

**Following heat transmission coefficients (Ψ [W/(mK)])
were validated:**

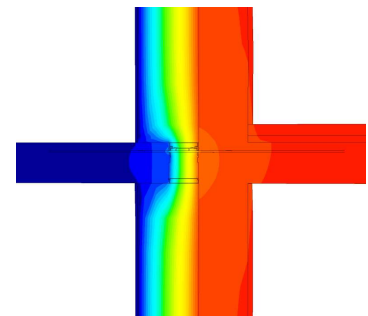

Isothermal map of
KXT50-V8

Product	Slab thickness				
	160	180	200	220	250
KXT30-V6	-	0.115	-	0.117	-
KXT45-V6	-	0.133	-	-	-
KXT50-V6	-	0.148	0.149	0.149	-
KXT50-V8	-	0.150	-	-	-
KXT65-V8	-	0.184	0.185	-	-

^{*)} The criterion was validated on both, a row house and a apartment dwelling
(according to criteria "balcony connection" v2.1.1)

The certificate includes types with minor statical performance. The thermal bridge
coefficient can be approximated by linear interpolation

