


CERTIFICATE

Certified Passive House Component

Component-ID 0600wi03 valid until 31st December 2024

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

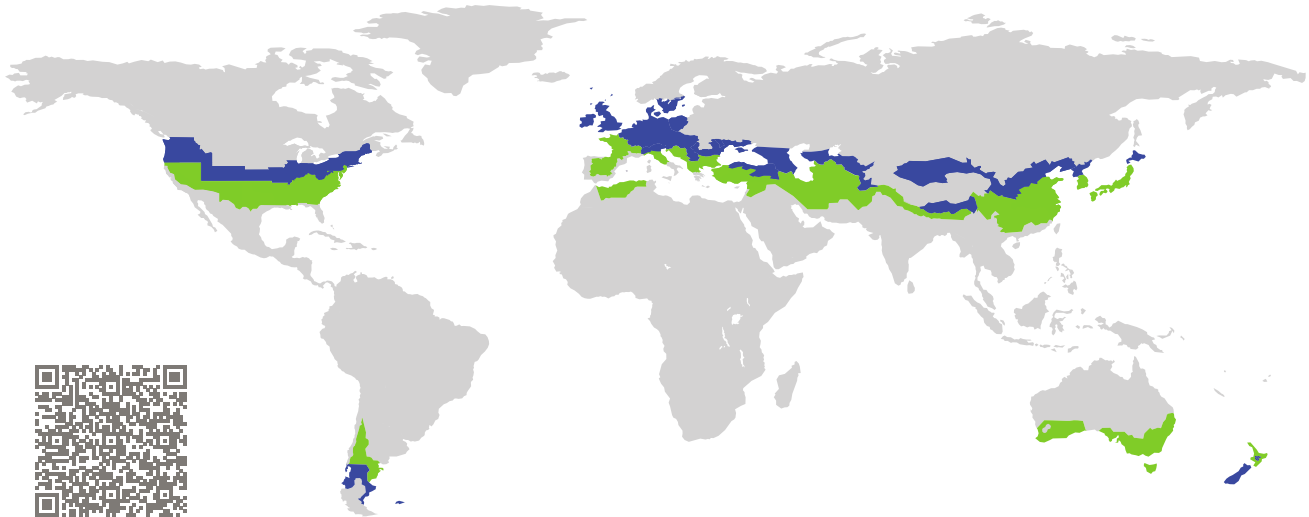


Category: **Window Frame**
Manufacturer: **Hebei Orient Sundar Windows Co., Ltd.,**
Gaobeidian City, Hebei Province,
China
Product name: **Passive 130 C**

This certificate was awarded based on the following criteria for the cool, temperate climate zone

Comfort $U_W = 0.79 \leq 0.80 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{W, \text{installed}} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$
with $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.70$

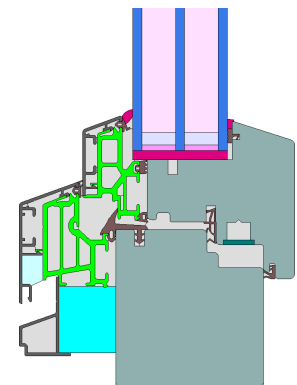

Passive House
efficiency class

phE

phD

phC

phB

phA


www.passivehouse.com

cool, temperate climate



**CERTIFIED
COMPONENT**

Passive House Institute

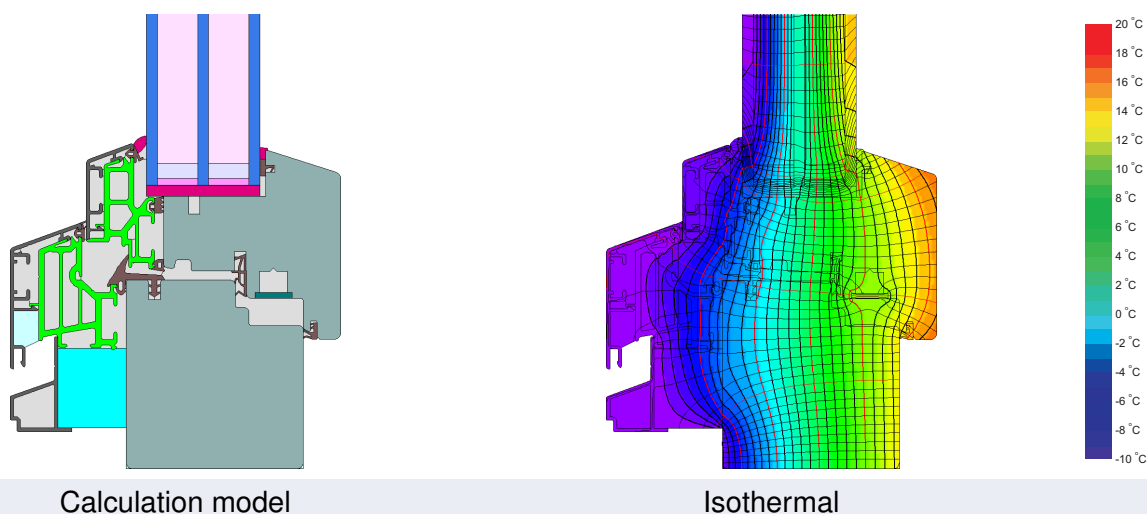

Description

Timber - PVC profile with aluminium facing shell. SEPS insulation (0.039 W/mK) in the jamb, XPS (0.032 W/mK) in the head and sill profile. Pane thickness: 48 mm (4/18/4/18/4), Rebate depth: 17 mm.

Explanation

The window U-values were calculated for the test window size of 1.23 m × 1.48 m with $U_g = 0.70 \text{ W}/(\text{m}^2 \text{ K})$. If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.70	0.64	0.58	0.54	$\text{W}/(\text{m}^2 \text{ K})$
		↓	↓	↓	↓	
Window	$U_W =$	0.79	0.75	0.72	0.69	$\text{W}/(\text{m}^2 \text{ K})$

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on www.passivehouse.com and passipedia.org.

Validated installations

Formwork blocks (operable)	Lightweight timber (operable)	Exterior insulation and finishing system (EIFS) (operable)
Ψ_{install} W/(m K) Top 0.009 Side 0.009 Bottom 0.013 $U_{W,\text{installed}} = 0.82 \text{ W/(m}^2 \text{ K)}$	Ψ_{install} W/(m K) Top 0.019 Side 0.019 Bottom 0.023 $U_{W,\text{installed}} = 0.85 \text{ W/(m}^2 \text{ K)}$	Ψ_{install} W/(m K) Top 0.008 Side 0.008 Bottom 0.013 $U_{W,\text{installed}} = 0.82 \text{ W/(m}^2 \text{ K)}$

Frame values		Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ -glazing edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Mullion 1 casement	(1M1)	155	0.82	0.026	0.71
Bottom	(OB1)	143	0.89	0.027	0.72
Top	(OH1)	143	0.73	0.027	0.72
Lateral	(OJ1)	143	0.73	0.027	0.72
Spacer: SWISSPACER Ultimate			Secondary seal: Polysulfide		

