


# CERTIFICATE

Certified Passive House Component

Component-ID 2265wi04 valid until 31st December 2025

Passive House Institute  
Dr. Wolfgang Feist  
64283 Darmstadt  
Germany

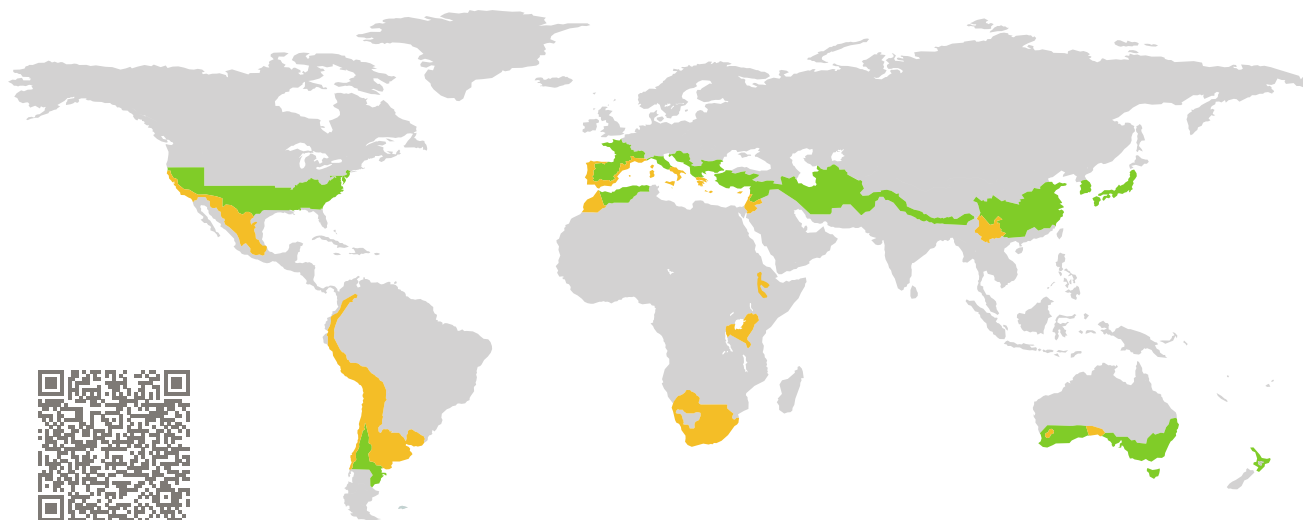


Category: **Window Frame**  
Manufacturer: **IBERBAMBOO S.L.,  
Buenache de Alarcón,  
Spain**  
Product name: **ibbo V92+**

**This certificate was awarded based on the following  
criteria for the warm, temperate climate zone**

Comfort  $U_W = 1.00 \leq 1.00 \text{ W}/(\text{m}^2 \text{ K})$   
 $U_{W, \text{installed}}$   $\leq 1.05 \text{ W}/(\text{m}^2 \text{ K})$   
with  $U_g$   $= 0.90 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene  $f_{Rsi=0.25} \geq 0.65$

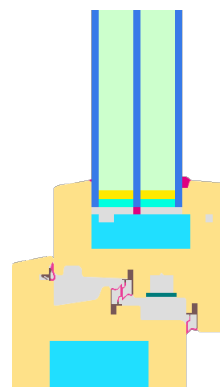

Passive House  
efficiency class

phE

phD

phC

phB


phA

warm, temperate climate



**CERTIFIED  
COMPONENT**

Passive House Institute

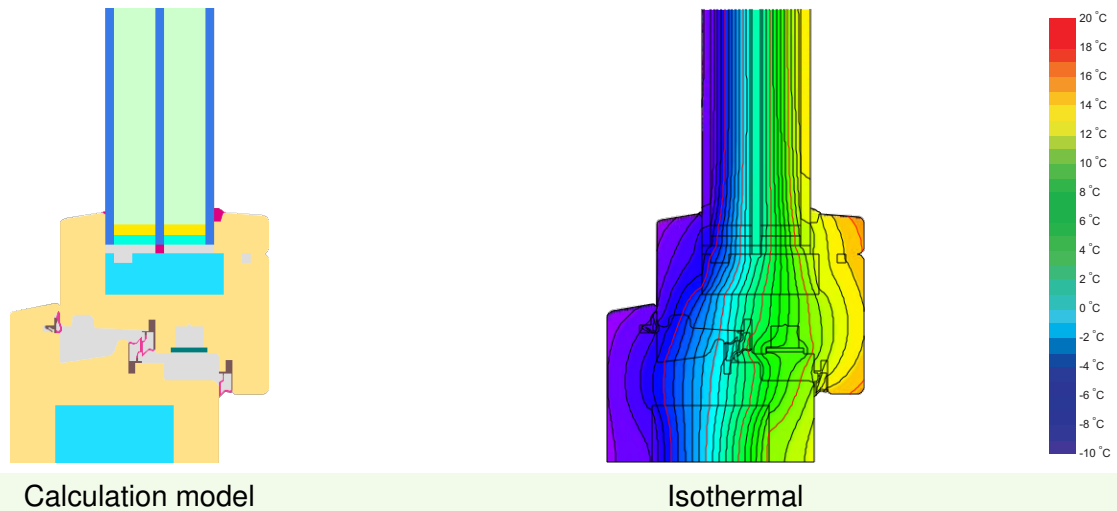

**Description**

Bamboo window frame (rated thermal conductivity 0,203 W/(mK)) insulated using soy-based polyurethane foam. The certification utilized a standard value for PU foam (0.027 W/(mK)) due to limited data on the proprietary product used by the manufacturer.

**Explanation**

The window U-values were calculated for the test window size of 1.23 m × 1.48 m with  $U_g = 0.90 \text{ W}/(\text{m}^2 \text{ K})$ . If a higher quality glazing is used, the window U-values will improve as follows:

Glazing	$U_g =$	0.90	0.70	0.64	0.58	W/(m <sup>2</sup> K)
		↓	↓	↓	↓	
Window	$U_w =$	1.00	0.86	0.82	0.78	W/(m <sup>2</sup> K)

Transparent building components are classified into efficiency classes depending on the heat losses through the opaque part. The frame U-Values, frame widths, thermal bridges at the glazing edge, and the glazing edge lengths are included in these heat losses. A more detailed report of the calculations performed in the context of certification is available from the manufacturer.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.

Further information relating to certification can be found on [www.passivehouse.com](http://www.passivehouse.com) and [passipedia.org](http://passipedia.org).

## Validated installations

Formwork blocks (operable)		Lightweight timber (operable)		Exterior insulation and finishing system (EIFS) (operable)	
$U_{Wall} = 0.25 \text{ W}/(\text{m}^2 \text{ K})$		$U_{Wall} = 0.25 \text{ W}/(\text{m}^2 \text{ K})$		$U_{Wall} = 0.23 \text{ W}/(\text{m}^2 \text{ K})$	
$\Psi_{install}$	W/(m K)	$\Psi_{install}$	W/(m K)	$\Psi_{install}$	W/(m K)
Top	0.008	Top	0.011	Top	0.007
Side	0.008	Side	0.011	Side	0.007
Bottom	0.022	Bottom	0.026	Bottom	0.018
$U_{W,installed} = 1.04 \text{ W}/(\text{m}^2 \text{ K})$		$U_{W,installed} = 1.05 \text{ W}/(\text{m}^2 \text{ K})$		$U_{W,installed} = 1.03 \text{ W}/(\text{m}^2 \text{ K})$	

Frame values		Frame width	$U$ -value frame	$\Psi$ -glazing edge	Temp. Factor
		$b_f$	$U_f$	$\Psi_g$	$f_{Rsi=0.25}$
		mm	W/(m <sup>2</sup> K)	W/(m K)	[-]
Flying Mullion	(FM1)	136	1.18	0.021	0.65
Bottom	(OB1)	110	1.07	0.021	0.72
Top	(OH1)	110	1.07	0.021	0.72
Lateral	(OJ1)	110	1.07	0.021	0.72
Spacer: Super Spacer Premium			Secondary seal: Butyl		

