


CERTIFICATE

Certified Passive House Component

Component-ID 0620ed03 valid until 31st December 2025

Passive House Institute
Dr. Wolfgang Feist
64283 Darmstadt
Germany

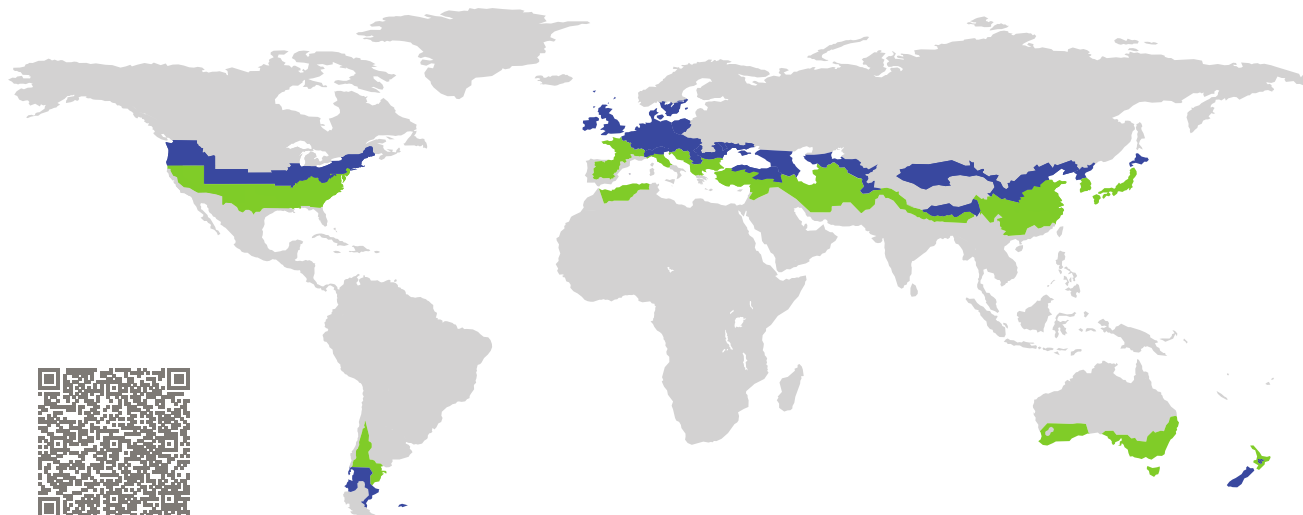


Category: **Entry door(with glas section)**
Manufacturer: **Brunkhorst Haustüren GmbH**
Anderlingen
Germany
Product name: **Brunkhorst Passiv 98 Portal**

This certificate was awarded based on the following criteria for the cool, temperate climate zone

Comfort $U_D = 0.60 \leq 0.80 \text{ W}/(\text{m}^2 \text{ K})$
 $U_{D,\text{installed}} \leq 0.85 \text{ W}/(\text{m}^2 \text{ K})$
with $U_{\text{door leaf}}^1 = 0.38 \text{ W}/(\text{m}^2 \text{ K})$

Hygiene $f_{Rsi=0.25} \geq 0.70$

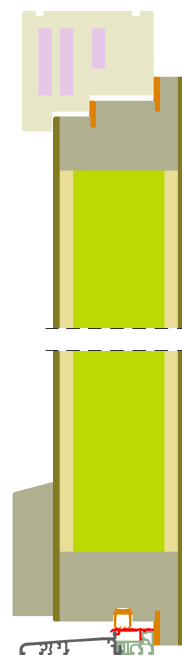

(Inward opening)


¹U-value of the insulated area of door leaf

cool, temperate climate



**CERTIFIED
COMPONENT**

Passive House Institute

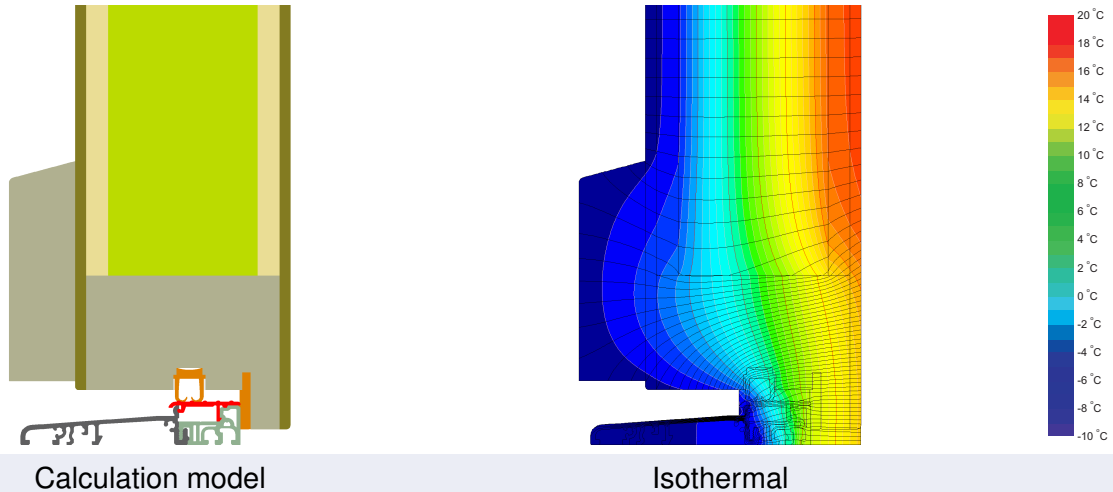

Calculation model

Isothermal

Description

Door frame made of wood and wooden-based materials; Door leaf insulation: PU-foam 0.030 W/(mK); Threshold: thermally separated aluminum profile, the temperature factor requirement is not met at the threshold.

Explanation




The U-values of the door apply to a door 1.10 m wide by 2.20 m tall.


A detailed report of the calculations performed in the context of certification is available from the manufacturer.

Unless stated otherwise, the air tightness was determined according to EN 1026 with respect to the joint length under climate load in conjunction with EN 1121 for the closed, non-locked door. The result corresponds at least to air-tightness class 3 according to EN 12207.

The Passive House Institute has defined international component criteria for seven climate zones. In principle, components which have been certified for climate zones with higher requirements may also be used in climates with less stringent requirements. In a particular climate zone it may make sense to use a component of a higher thermal quality which has been certified for a climate zone with more stringent requirements.


Further information relating to certification can be found on www.passivehouse.com and passipedia.org.


Frame values		Frame width b_f mm	U -value frame U_f W/(m ² K)	Ψ edge Ψ_g W/(m K)	Temp. Factor $f_{Rsi=0.25}$ [-]
Door hinge side	(DJ1) 	119	0.92	0.001	-
Door lock side	(DL1) 	201	0.92	0.001	-
Top	(OH1) 	119	0.92	0.001	-
Threshold	(OT2) 	129	1.26	0.001	-
		Spacer:	Secondary seal:		




Door hinge side

$b_f = 119 \text{ mm}$
 $U_f = 0.92 \text{ W/(m}^2 \text{ K)}$
 $\Psi_g = 0.001 \text{ W/(m K)}$
 $f_{Rsi} = -$

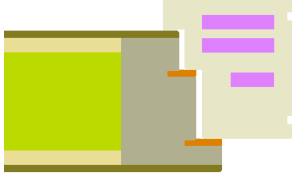

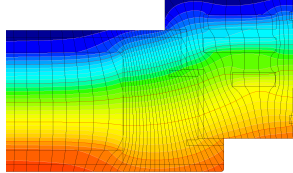
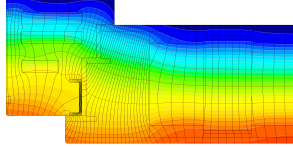





Door lock side

$b_f = 201 \text{ mm}$
 $U_f = 0.92 \text{ W/(m}^2 \text{ K)}$
 $\Psi_g = 0.001 \text{ W/(m K)}$
 $f_{Rsi} = -$










Top

$b_f = 119 \text{ mm}$
 $U_f = 0.92 \text{ W/(m}^2 \text{ K)}$
 $\Psi_g = 0.001 \text{ W/(m K)}$
 $f_{Rsi} = -$










Threshold

$b_f = 129 \text{ mm}$
 $U_f = 1.26 \text{ W/(m}^2 \text{ K)}$
 $\Psi_g = 0.001 \text{ W/(m K)}$
 $f_{Rsi} = -$





Door with glass section/infill

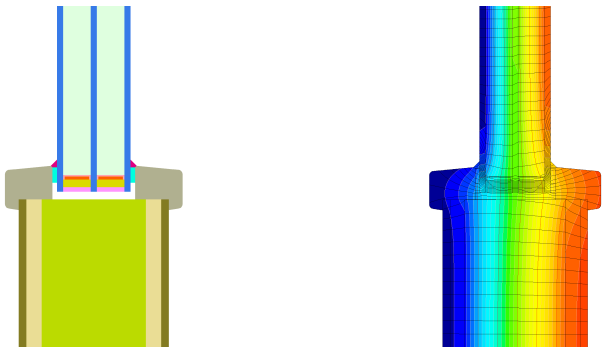Glazing/Infill: 1	
$U_p = 0.53 \text{ W}/(\text{m}^2 \text{ K})$ $\psi = 0.048 \text{ W}/(\text{m K})$ $f_{Rsi} = -$	 The image contains two side-by-side diagrams. The left diagram is a technical cross-section of a door glazing assembly. It shows a central glass pane held in place by a grey frame. The glass is supported by a yellow spacer bar. The right diagram is a thermal simulation of the same assembly, showing a color-coded temperature distribution. The glass pane is the warmest (red/orange), while the frame and spacer are cooler (blue/green).
Description:	Glazing (4/18/4/18/4) with $U_g = 0.53 \text{ W}/(\text{m}^2 \text{ K})$ in accordance with EN 673; Spacer: "Thermix" The comfort criterion limits the use of the infill element as follows: Maximum area= 0.99 m^2 Maximum circumference= 4.74 m

